


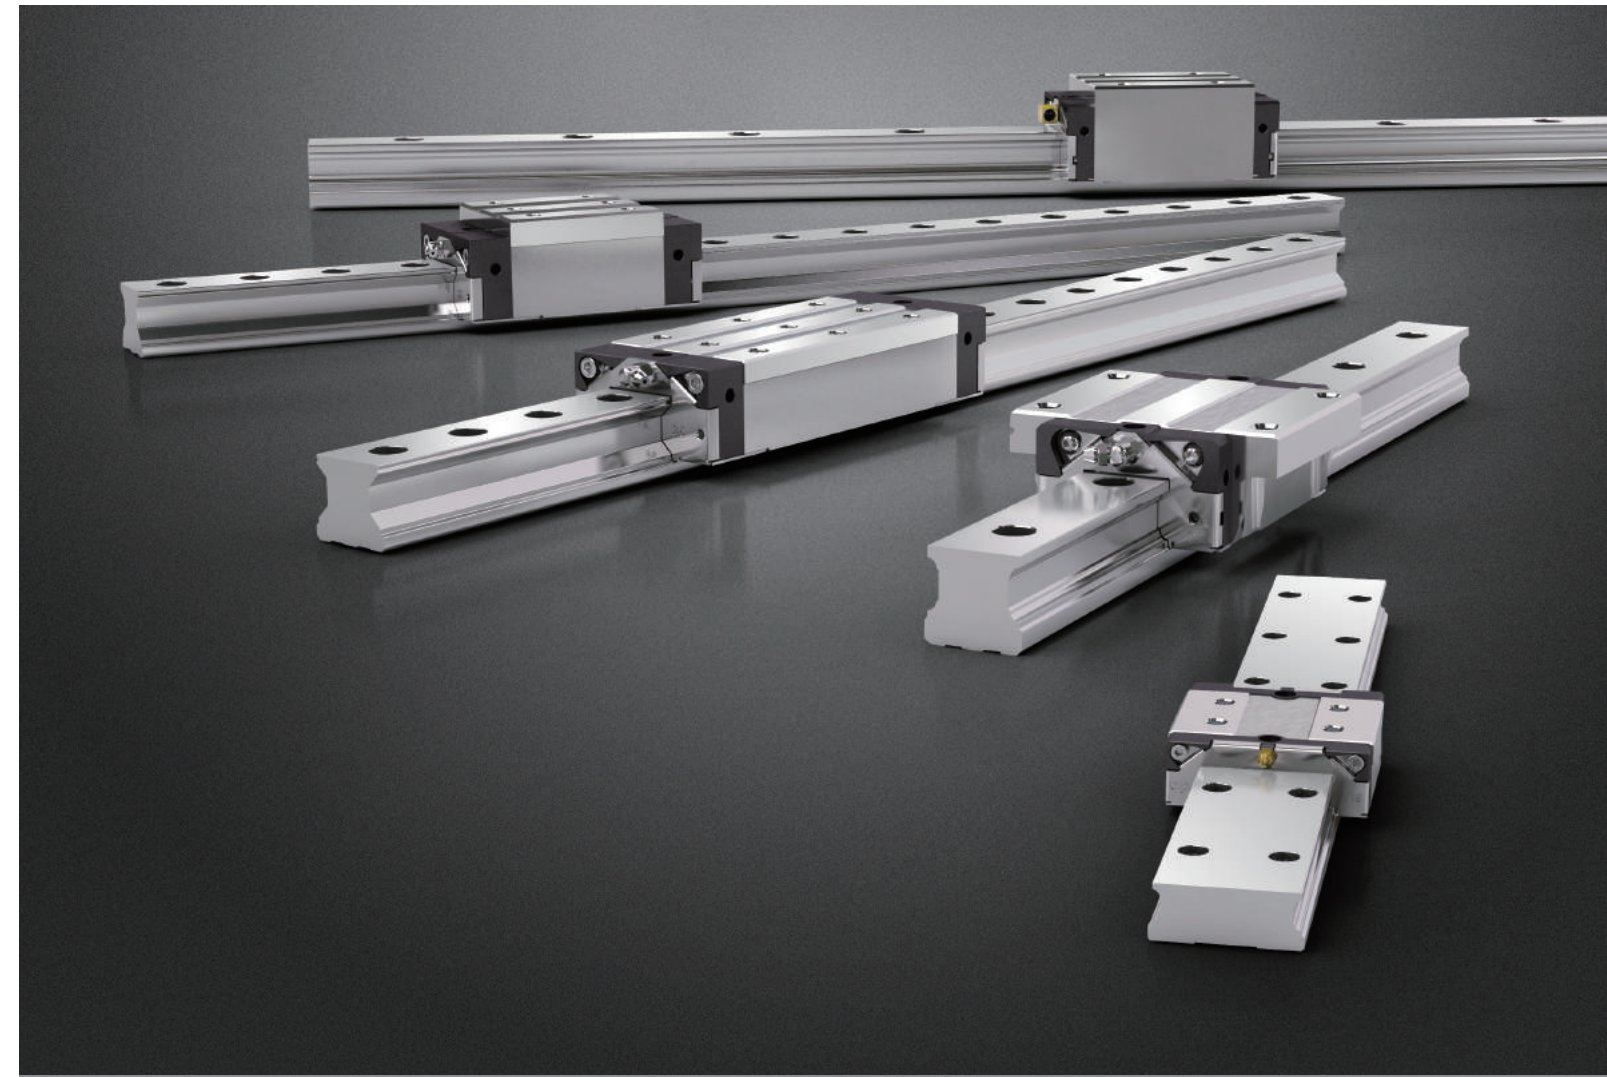

ARC/HRC/ERC Standard 4-Row Ball Bearing Linear Guide
WRC Wide 4-Row Ball Bearing Linear Guide
ARR/HRR/LRR Standard 4-Row Roller-type Linear Guide

* cpc reserves the right to revise any information(technical details) any time without notice, for printing mistakes or any other incidental mistakes. We take no responsibility.

cpc CHIEFTEK PRECISION Co., LTD.

HEADQUARTERS
CHIEFTEK PRECISION Co., LTD.
No.3, Dali 1st Rd., Sinshih Township,
Tainan Science Park, 741-45 Tainan, Taiwan, R.O.C
TEL:+886-6-505 5858 Http://www.chieftek.com
E-mail:service@mail.chieftek.com

CHIEFTEK PRECISION USA
4881 Murietta Street.
Chino, CA. 91710
Tel: +1-909-628-9300
Fax: +1-909-628-7171

cpc Europa GmbH
Industriepark 314,
D-78244 Gottmadingen, Germany
TEL: +49-7731-59130-38
FAX: +49-7731-59130-28

CHIEFTEK MACHINERY KUNSHAN Co., LTD.
No.1188, Hongqiao Rd, Kunshan,
Jiangsu, P.R. China
TEL:+86-512-5525 2831
FAX:+86-512-5525 2851



Contents

ARC/HRC/ERC Standard 4-Row Ball Bearing Linear Guide

ARC/HRC/ERC OverviewP01~P02

Product Design (Standard).....P03~P04

Product Design (Option).....P07~P10

Installation Notice.....P11

Technical Information.....P12~P13

Ordering Information.....P14

Dimensions Table.....P15~P22

AR/HR/ER Lightweight Ball Bearing Linear Guide

AR/HR/ER OverviewP23

Technical Information.....P24

Ordering Information.....P24

Dimensions Table.....P25~P27

WRC Wide 4-Row Ball Bearing Linear Guide

Ordering Information.....P28

Dimensions Table.....P28~P30

ARR/HRR/LRR 4-Row Roller-type Linear Guide

Product DesignP31~P32

Ordering Information.....P32

Dimensions Table.....P33~P40

Nipple Option

Nipple Option.....P41~P44

Lubrication Storages Pad Testing Report

Lubrication Storages Pad Testing Report.....P45

Product Overview


ARC/HRC/ERC Product Characteristics

The **cpc** ARC/HRC/ERC Linear Guide Series uses the O-type arrangement for the four row ball circulation design. The contact angle between the rail and ball is 45 degrees, and can realize the 4 directional load effects. **cpc** places special emphasis on strengthening the Arm length(Lo), so when sustaining external force F, will have even higher Mr value to increase the rigidity and static moment capability. In addition, the runner block for the same size uses larger and more balls, so will outperform competitor's models by 10% to 30% regarding load capabilities. The products have characteristics of high load, high moment, and high stiffness.


Unit:mm

Mode Code	Lo	Hc
15	12.4	9.35
20	16.4	12.5
25	19.5	14.5
30	24.0	17
35	30.4	19.5
45	38.2	24
55	43.1	28.5


$$F = Mr/Lo (Lx)$$

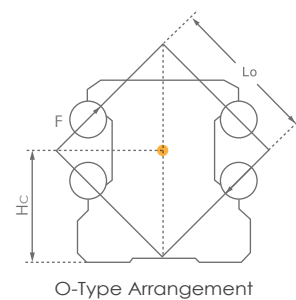

O-Type Arrangement



X-Type Arrangement

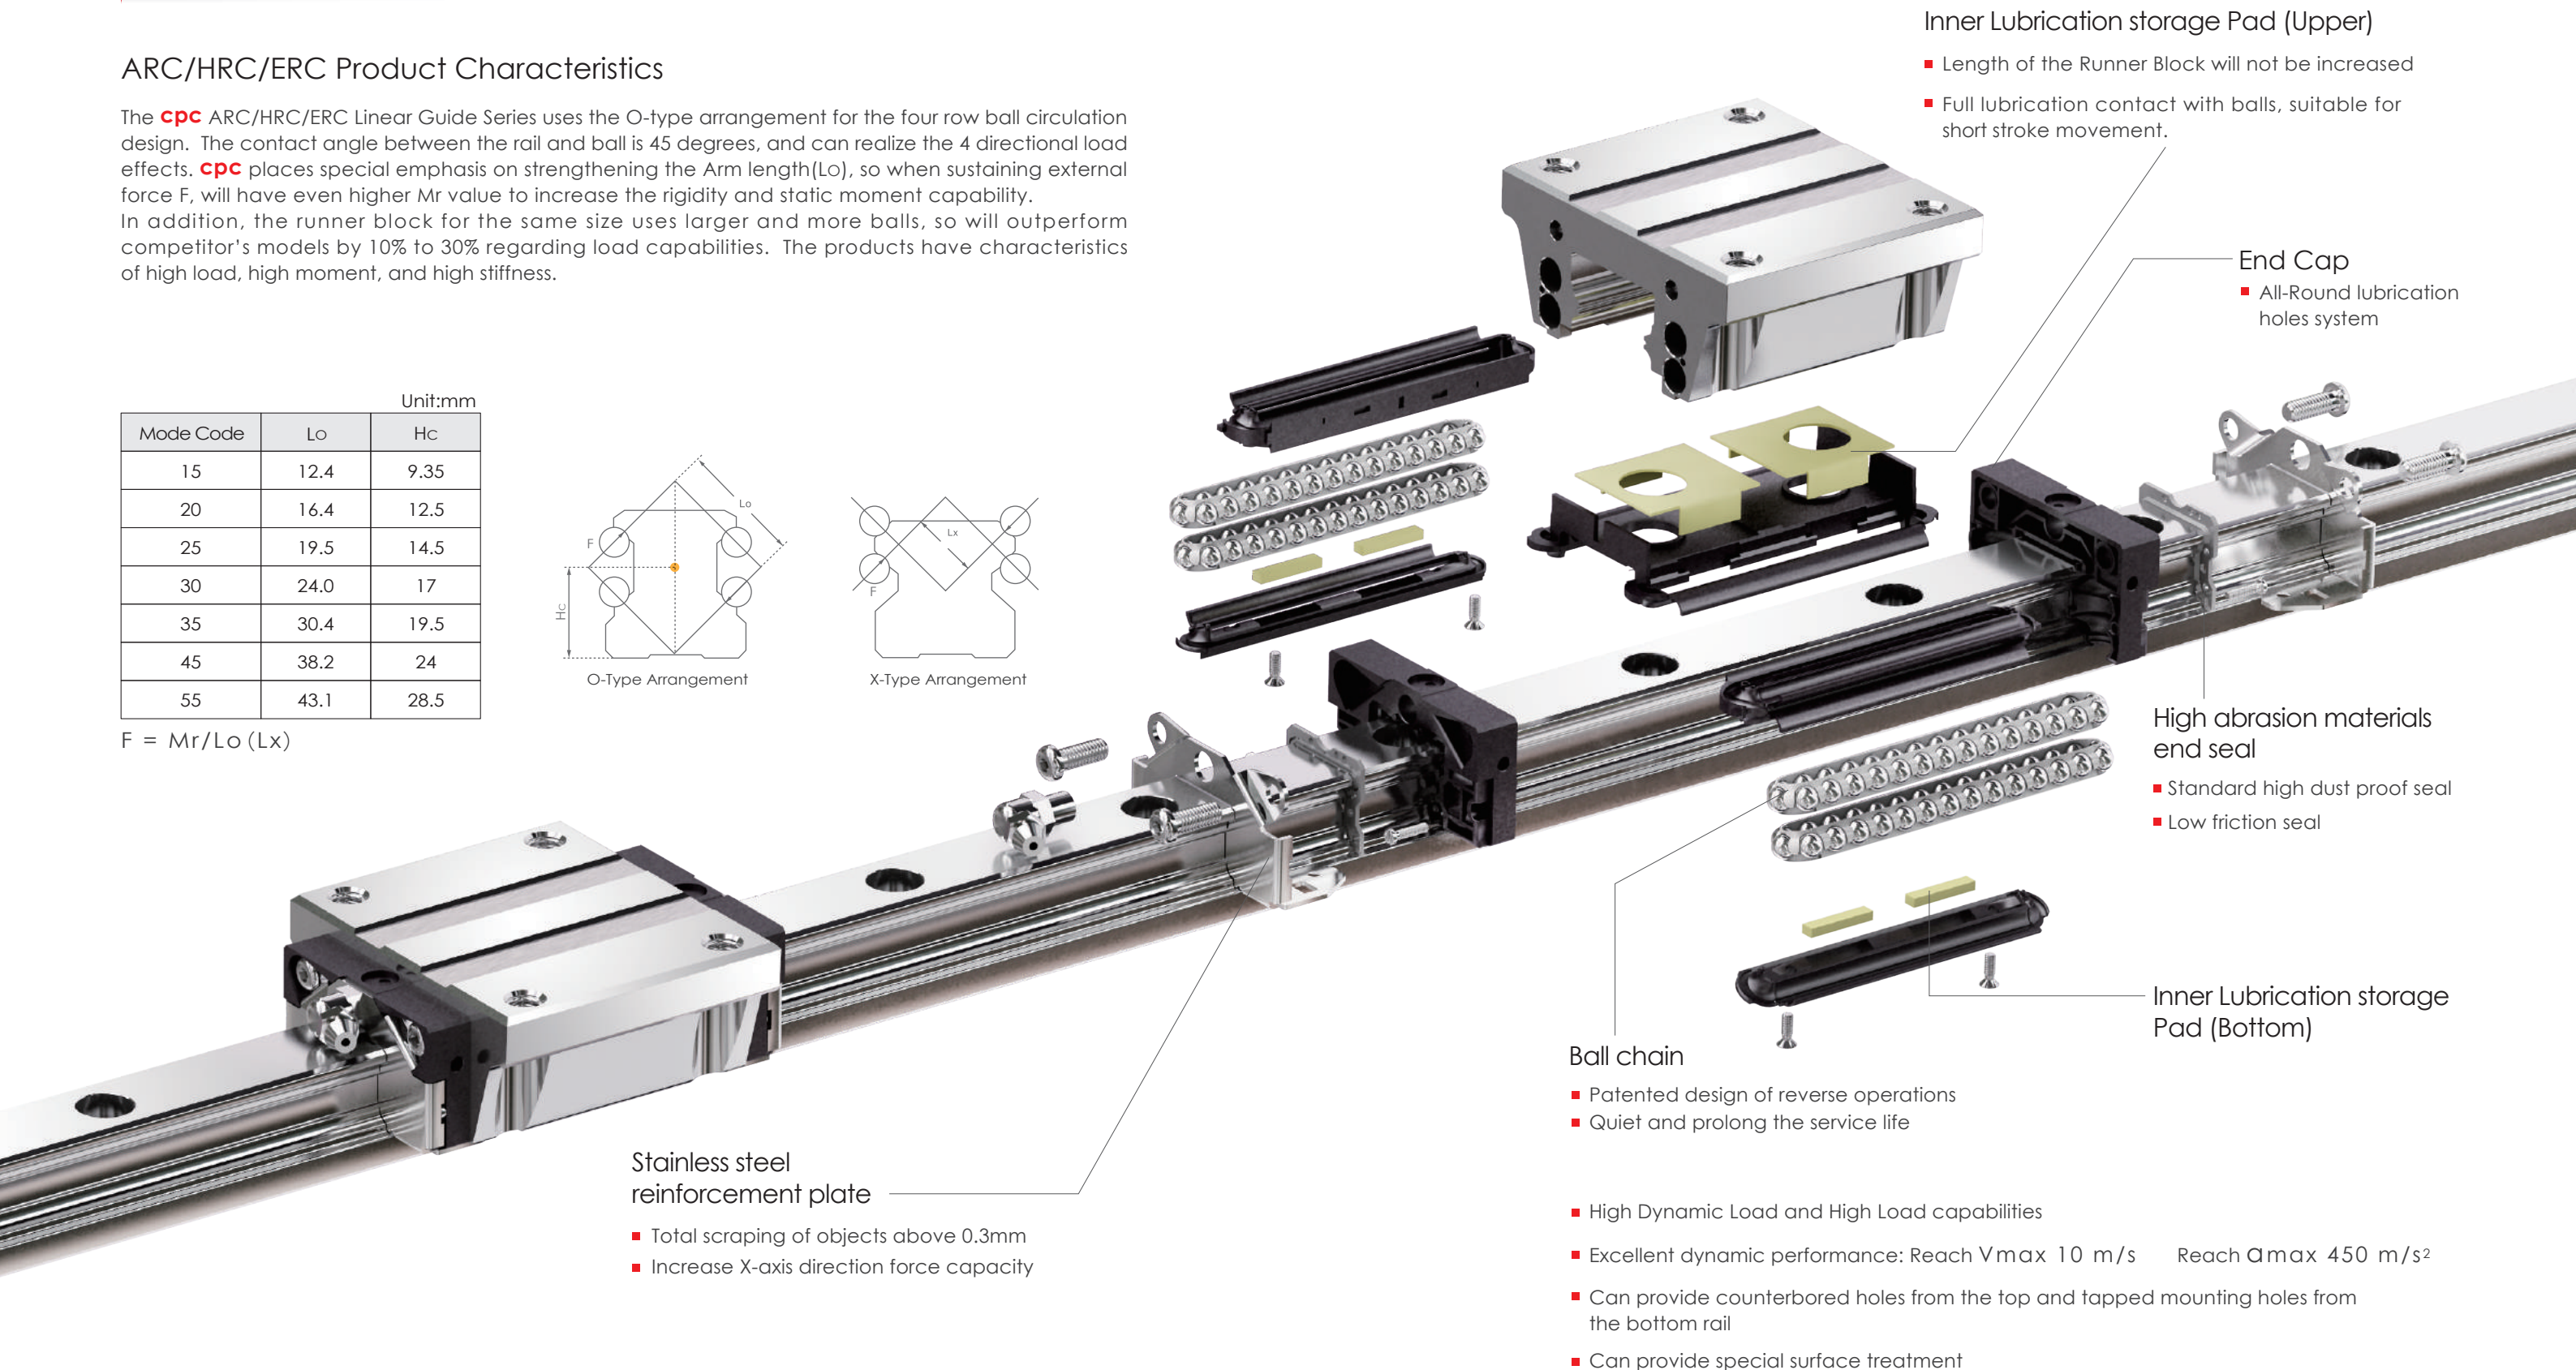

Inner Lubrication storage Pad (Upper)

- Length of the Runner Block will not be increased
- Full lubrication contact with balls, suitable for short stroke movement.

End Cap

- All-Round lubrication holes system

High abrasion materials end seal

- Standard high dust proof seal
- Low friction seal

Inner Lubrication storage Pad (Bottom)

Ball chain

- Patented design of reverse operations
- Quiet and prolong the service life

Stainless steel reinforcement plate

- Total scraping of objects above 0.3mm
- Increase X-axis direction force capacity

- High Dynamic Load and High Load capabilities
- Excellent dynamic performance: Reach Vmax 10 m/s Reach amax 450 m/s²
- Can provide counterbored holes from the top and tapped mounting holes from the bottom rail
- Can provide special surface treatment

Product Design (Standard)


Dustproof design

Inner seals

The newly designed inner seals, can protect foreign objects from sliding into the rails while maintaining low friction. It can also allow the lubrication oil to be maintained inside the runner block and prolong the re-lubrication interval.

Bottom Seals

The bottom seals can prevent foreign objects from entering the bottom and prevent lubrication from leaking out. With full sealing design, it reduces the amount of oil usage, prolong the re-lubrication interval, and prolong the service life.

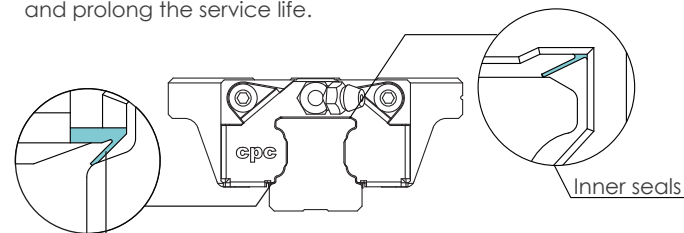




Bottom Seals

End Seals

The **cpc** double lips type end seals can prevent foreign objects from entering from the side and preventing lubrication oil and grease from leaking. The flexibility of the engineering plastic material has better friction resistance ability and better prevents cracking characteristics than typical NBR plastic.

Stainless Steel Reinforcement Plate

With clearance between rail profile of no more than 0.3mm, the plate can scrape large items such as iron filings to protect the end seals

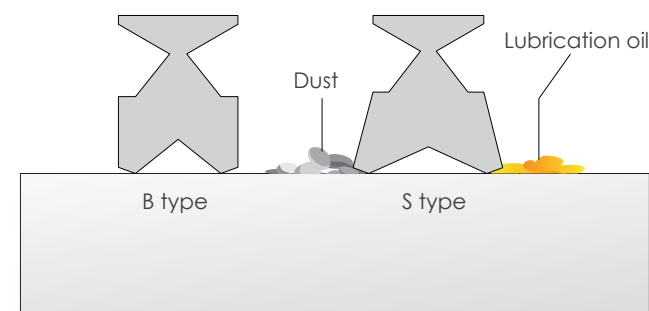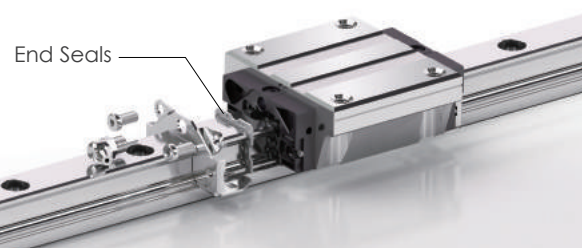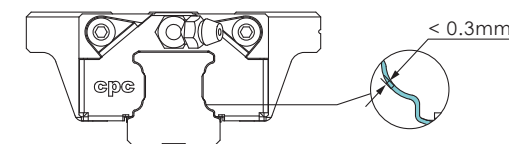

Standard seals (S)


Directly in contact with the rail surface, having better dustproof and lubrication holding capabilities. **cpc** recommends using this type of seals in environments that is exposed for long durations to high dusts and saw wood dust, etc. The friction will be higher than B type seals (low friction seals)

Low friction seals (B)

Suitable for most conditions, with slight contact with the rail, and having both scraping function with low friction.

Comparison of friction of seals

The friction will be the highest on new linear rails. After short period of operation, friction will be reduced to a constant level.

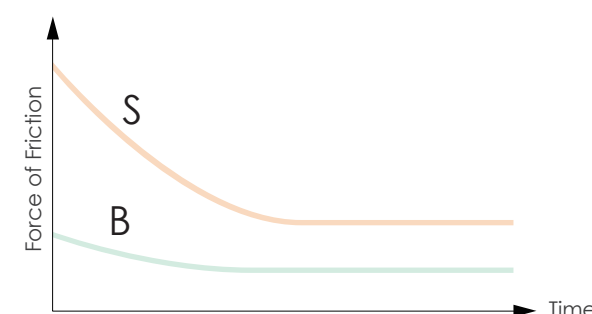

Average Friction of Block

Below is the friction table for Block Body and End Seal under the condition of without any grease

Unit : N

ARC/HRC/ERC							
Block Type	Friction caused from ball bearing				Bottom Seals + Inner Seals	End Seals (2 sides)	
	Preload Class					S-Type Standard	B-Type Low friction
	VC	V0	V1	V2			
15MN/FN	0.30	0.65	0.85	1.10	1.5	2.0	0.5
20MN/FN	0.40	0.75	1.40	1.60	2.0	2.5	1.0
25MN/FN	0.60	0.95	1.30	1.95	2.5	3.0	1.5
30MN/FN	0.55	1.10	2.00	3.10	3.0	5.0	2.0
35MN/FN	0.65	1.25	2.50	3.25	3.0	8.0	3.0
45MN/FN	0.85	2.10	2.80	4.00	4.0	11.0	4.0

Unit : N

ARC/HRC/ERC							
Block Type	Friction caused from ball bearing				Bottom Seals + Inner Seals	End Seals (2 sides)	
	Preload Class					S-Type Standard	B-Type Low friction
	VC	V0	V1	V2			
15MS/FS	0.30	0.60	0.80	1.00	1.5	2.0	0.5
20MS/FS	0.40	0.70	1.10	1.40	2.0	2.5	1.0
25MS/FS	0.50	0.90	1.20	1.80	2.5	3.0	1.5
30MS/FS	0.50	1.00	1.80	2.30	3.0	5.0	2.0

Unit : N

ARC/HRC/ERC							
Block Type	Friction caused from ball bearing				Bottom Seals + Inner Seals	End Seals (2 sides)	
	Preload Class					S-Type Standard	B-Type Low friction
	VC	V0	V1	V2			
15ML/FL	0.40	0.70	0.90	1.40	1.5	2.0	0.5
20ML/FL	0.50	0.80	1.60	1.80	2.0	2.5	1.0
25ML/FL	0.70	1.20	1.80	2.00	2.5	3.0	1.5
30ML/FL	0.80	1.40	2.20	2.80	3.0	5.0	2.0
35ML/FL	0.90	1.60	2.70	3.50	3.0	8.0	3.0
45ML/FL	1.00	2.30	3.50	4.55	4.0	11.0	4.0

Applied example

①. ARC25MN SZ V1N

Block friction = 1.3+2.5+3 = 6.8N

②. HRC30FL BZ V0P

Block friction= 1.4+3+2 = 6.4N

Friction caused from ball bearing

Bottom Seals + Inner Seals

+ End Seals (2 sides)

Block friction

Product Design

(Standard)

Saw wood dust Test

Test content


This test uses a total of 4 groups of products (using 2 rails match with 2 lubrications methods) by putting in saw wood dust and moving them within.

Rail

1. Tapped from top rail plus hole plugs (AR)
2. Tapped from bottom rail (ARU)

Runner Block

1. Installation of standard seals (S), using grease
2. Installation of lubrication storage Pad and standard seals (SZ), using grease

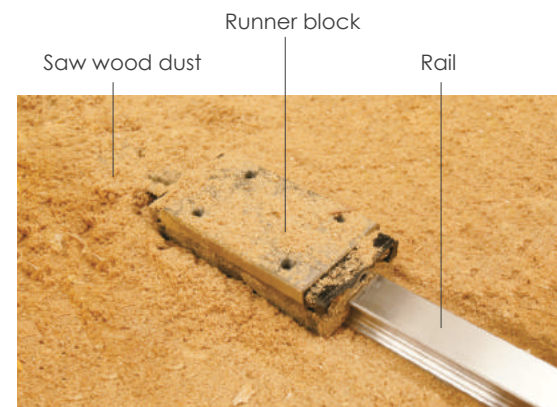


Testing conditions

1. Stroke = 600mm
2. Total testing stroke = 30m


Test items

1. If Saw wood dust enters the inner parts of the runner block
2. If Saw wood dust enters the ball raceway

Test results



Tapped from bottom (oil)



Tapped from bottom (grease)

Checked Item	Saw wood dust enter inner part of runner block	Saw wood dust enter ball bearing runner area
ARU Rail SZ Type Runner Block (Grease oil)	No	No
ARU Rail S Type Runner Block (Grease lubrication)	No	No
AR Rail SZ Type Runner Block (Grease Oil)	Yes (belly area)	No
AR Rail S Type Runner Block (Grease Lubrication)	Yes (belly area)	No

Test result


- The Tapped from top rail has hole plugs, leading to unevenness of rail, allowing some saw wood dust to enter the runner block belly area. The 2 sides of the runner block belly area is protected by stainless steel reinforcement plates and end seals that completely protect the ball bearing, so the ball bearing runner area is fully protected from Saw wood dust.
- The tapped from bottom rail has even rail surface, so the ball bearing runner area is fully protected from Saw wood dust.

Stainless steel reinforcement plate (Patent)

Both sides are available for scraping function

Using 2 stainless steel reinforcement plates, the L type design can fasten the screws onto the top and bottom of the runner block, reinforcing the rigidity of the end caps and cladding.

The clearance between the rail profile with the seal design is below 0.3mm, reinforcing the steel plates while having scraper functions.

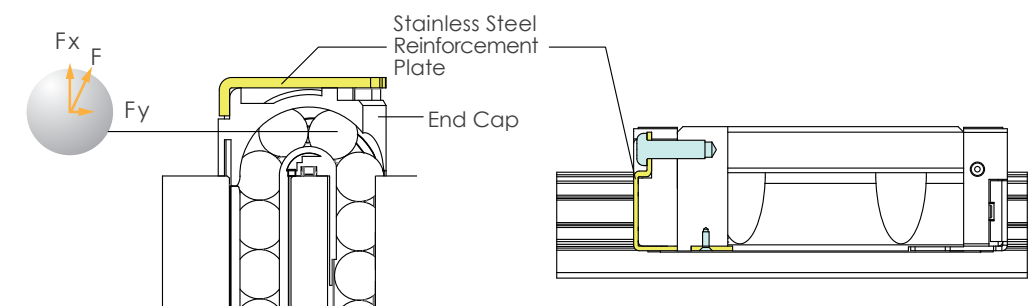


Function of high speed operation

The ARC/HRC/ERC type uses the stainless steel reinforcement plates to strengthen the bottom latches, while increasing X-axis direction force capacity, and increasing operation speed.

$V_{max} > 10 \text{ m/s}$

$a_{max} > 450 \text{ m/s}^2$

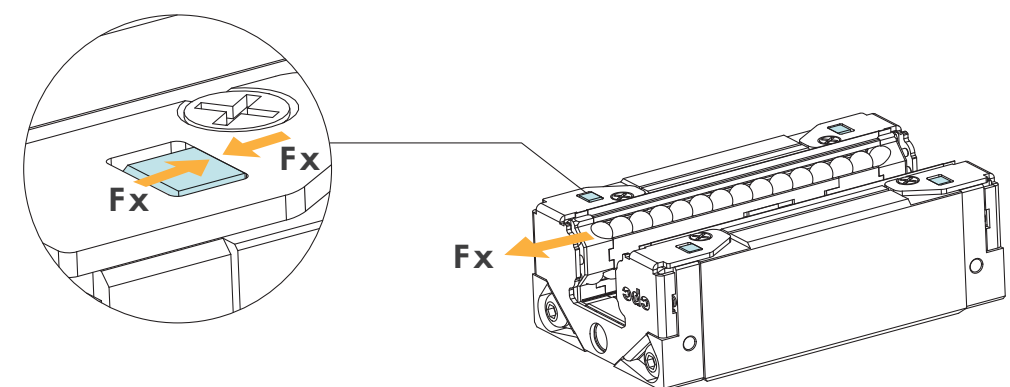

All-direction Lubrication Nozzles

On the top, bottom, and sides, there are oil injection nozzles designed, the upper runner block comes with O-ring seal, and easily complete the oiling from top. Diversified comprehensive oil injection methods, suitable for installation axial and oil injection methods.




Product Design

(Option)


Low noise, high quality and high speed design ball chain (Patent)

Ordering code: C


Traditional Ball type linear guide, producing double the speed of slide contact with neighboring balls in different directions for spinning effects. Extremely high friction greatly reduce service life; also, the contact point between balls produce high pressure and noise, and increase the possibility of damagers of film cladding.

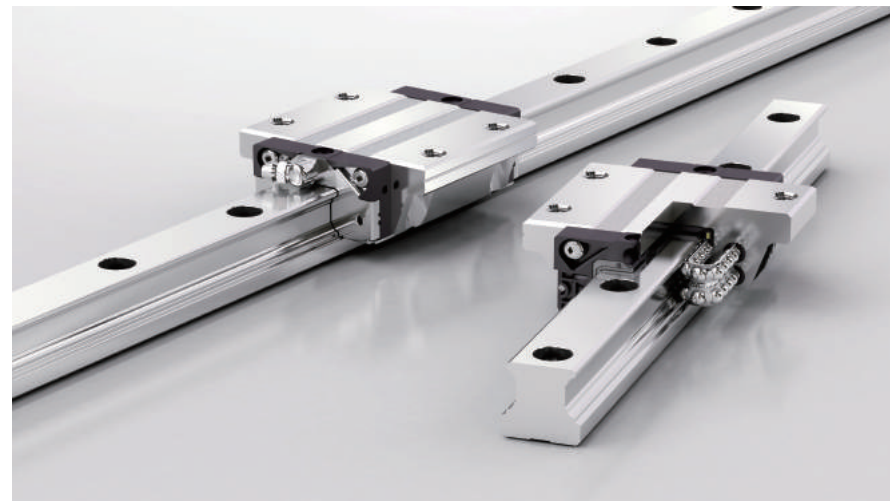

Low noise ball chain

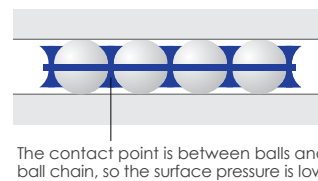

Traditional Ball type linear guide


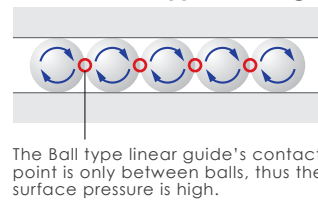


* **cpc** Ball Chain can provide greater contact area between ball and ball chain, so film cladding will eliminate damage and lower noise volume. Balls can move at higher speed and extend its service life.


* The size of the ball chain design block is as the same as the normal type, and therefore it can use the same rail.

Heavy load test

Condition
Model : ARC25MN SZC V1H
Velocity : 1m/sec
Load capacities : 7.44kN(0.3C)
Dynamic load rating C_{100} : 24.8kN
Stroke : 960mm
Preload : 0.05C
Rating Life $\left(\frac{C}{P}\right)^3 \times 100km = \left(\frac{C}{0.05C+0.3C}\right)^3 \times 100km = 2332km$

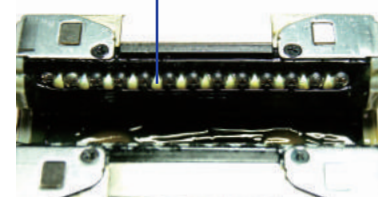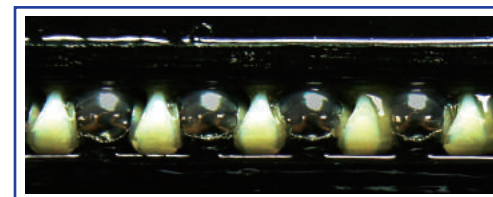


After testing, grease remains and no anomaly in the balls and grease.

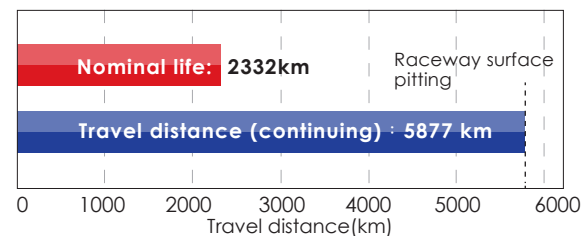

Smoothness test




Model code : ARC25MNSV1N
Velocity : 10 mm/sec

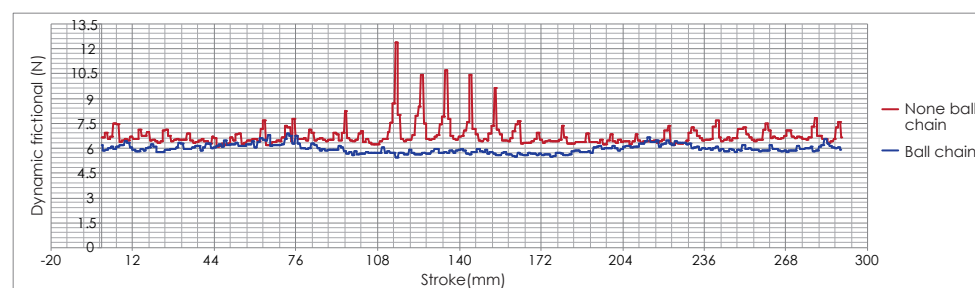

Load capacity of ball chain

There are three advantages of ARC/HRC/ERC series with ball chain in compare with traditional block without ball chain:

1. The spaceblock of ball chain can prevent the oil film from rupturing by neighboring balls' contact and decrease the wear by strong friction.
2. The retainer of ball chain can maintain good quality of oil film by continuously applying grease on the moving part.
3. The ball chain provides the function of the moving and leading the steel balls. The block without ball chain, its steel balls are pushed by the back steel balls while entering the raceway, so the contact angle between balls and rail is uncertain, and also easy to cause vibration and increase the stress. The block with ball chain, its balls are led by ball chain, so it can fit correctly while entering the raceway and the contact angle will be accurate. Ball chain provides smooth running, less vibration and less stress.

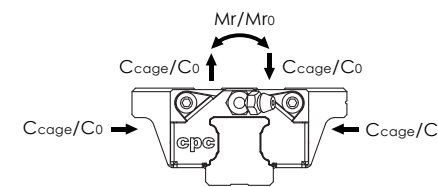

Dynamic rating load

The attached right table shows the C_{cage} and C_{iso} value via testing from different type of machines.

(According to ISO-14728 regulations)

Model Code		C_{iso} (kN)	C_{cage} (kN)
ARC-MN C	15	9.4	11.8
ARC-FN C	20	15.4	22.3
HRC-MN C	25	22.4	33.6
HRC-FN C	30	31.0	46.5
ERC-MN C	35	43.7	65.6
	45	67.6	101.4
ARC-ML C	15	12.5	15.6
HRC-ML C	20	18.9	27.4
HRC-FL C	25	28.5	42.8
ERC-ML C	30	38.0	57.0
	35	50.6	75.9
	45	86.2	129.3
ARC-MS C	15	7.1	8.9
ARC-FS C	20	11.6	16.8
ERC-MS C	25	16.8	25.2
	30	21.3	32.0

Static rating load & Static torque

The C type block of ARC/HRC/ERC will increase the pitch between balls on the operating profile. Therefore, the static rating load C_0 and the static rating torque M_{r0} , M_{p0} and M_{y0} value will be decreased.


Model Code		Static rating load(kN)	Static torque(Nm)		
		C_0	M_{r0}	M_{p0}	M_{y0}
ARC-MN C	15	16.2	130	95	95
ARC-FN C	20	25.7	275	200	200
HRC-MN C	25	36.4	465	340	340
HRC-FN C	30	49.6	780	530	530
ERC-MN C	35	70.2	1575	1010	1010
	45	102.8	2955	1775	1775
ARC-ML C	15	24.3	195	215	215
HRC-ML C	20	34.3	370	350	350
HRC-FL C	25	51.6	655	640	640
ERC-ML C	30	66.1	1040	900	900
	35	94.7	1940	1575	1575
	45	159.7	4185	3280	3280
ARC-MS C	15	10.8	85	45	45
ARC-FS C	20	17.1	185	85	85
ERC-MS C	25	24.3	310	145	145
	30	28.9	455	205	205

Product Design (option)

Lubrication Design (Ordering Code: Z) (ARC/HRC)


Inner oil storage and oil supply system design

Inner PU Lubrication Storage Pad design does not increase length of runner block and can contact directly with all balls. Customer can inject lubrication oil through lubrication holes and can save enough lubrication oil within the PU Lubrication storage pad to ensure long term lubrication effects, conforming to environment protection needs and lowering maintenance costs. Excellent performance when used in short stroke.

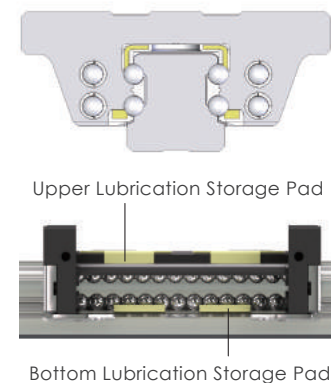


External NBR Seal with Metal Scraper (Ordering Code: SN) (ARC/HRC/ARR/HRR/LRR)

Available for applications in harsh environment such as grinding machine, glass working machine, graphite machine, wood-working machinery, dust-proof solution

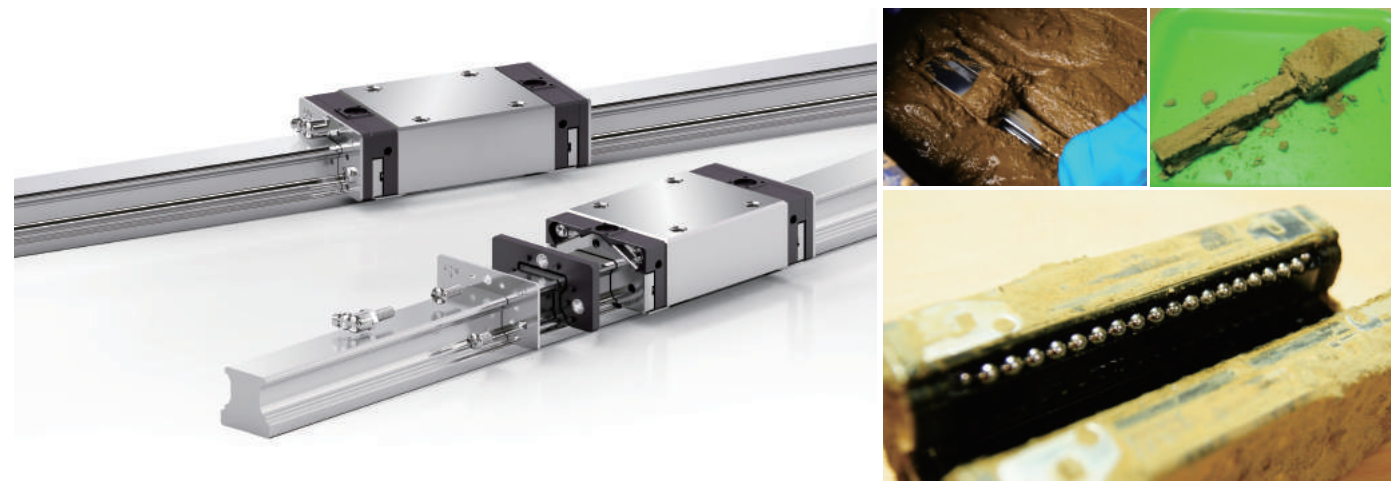

Dimensions and Specifications

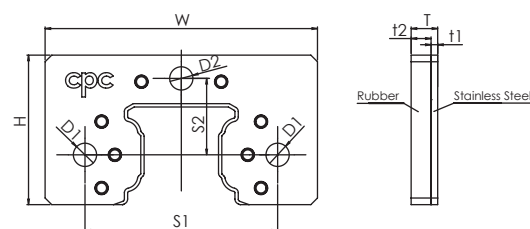


Unit: mm

Model Code	Exterior Dimension					Bore Specification				Screw Specification			
	T	t1	t2	W	H	S1	S2	D1	D2	N1	N2	Ln	
15	4	1	3	33	20.3	25	10.2	3.5	3.5	M3x0.35	M3x0.5	9	
20	4	1	3	41	22.5	29	11.5	3.5	3.5	M3x0.35	M3x0.5	9	
25	5.2	1.2	4	47	26.5	36.5	13.5	3.5	6.5	M3x0.5	M6x0.75	12	
30	6	1.5	4.5	58	34.2	42.5	17.5	4.5	6.5	M4x0.5	M6x0.75	12	
35	6	1.5	4.5	68	39.3	50	20.5	4.5	6.5	M4x0.5	M6x0.75	12	
45	6	1.5	4.5	84	49.6	65	24.9	4.5	10	M4x0.5	PT1/8	15	

Installation manual

1. Set block on the rail before installing external NBR seal.
2. Make sure rubber part is fitted in the sleeve. If rubber parts fall off, please set the sleeve to the correspondent bore.
3. Overlap rubber part and metal scraper with the corresponding salient point and the bore. cpc logo must be facing outward.
4. Slide the external NBR seal into rail from two sides and closely connect with the block.
5. Fasten screw into the correspondence bore. Make sure the seal is centre aligned with the rail while fastening. Do not make metal scraper contact with guide rail.

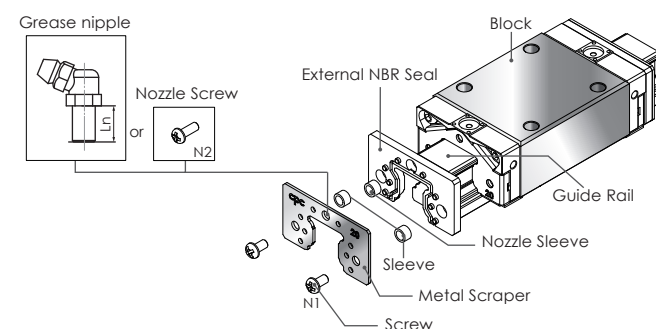


Metal-Plastic-Cap Patent Design for Standard Rail-Bolt-Hole (With patent) (Ordering Code: MPC)


Metal Cap Features Introduction

The Most Convenient Metal Cap Used in Industry


- The upper part of the cap is made of stainless steel, and can prevent sharp foreign objects from piling up on the bolt-hole, resulting in affecting the end seal function.
- The lower part of the cap is made of plastic, and can directly be installed on standard rail, no need to conduct other fine slot milling for bolt-hole.
- The bolt-hole chamfer for standard rail is C0.2mm. For further strict dustproof request, non-bolt-hole chamfer rail is optional upon ordering.



Bolt-Hole with Chamfer (standard)




Bolt-Hole without Chamfer (optional: /TR)

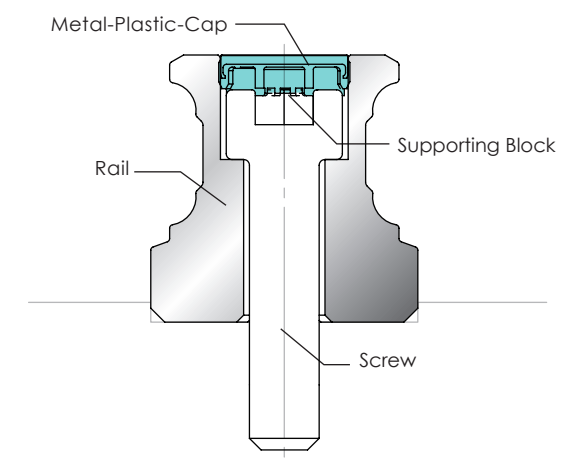

Cap can be Smoothly Installed on Bolt-Hole

Bolt-hole cap of conventional linear guides, due to not having good control in hammering, results in cap being hammered too deep or unevenness, and will accumulate dirt or scrap iron easily. cpc cap is especially designed with supporting block to prop up the cap, fixing with the screw stably, and thus prevent sinking.

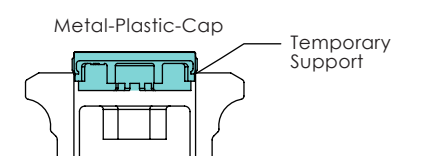


Cap before Hammering (Plastic Support)



Plastic Support after Hammering (8 supporting block become deformed, and fit with the screw)

Dimensions and Specifications

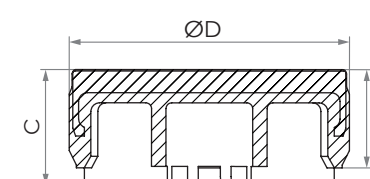


Model Code	Screw	External Diameter D	Cup Height H	Block Height C	Rail
A4	M4	7.7	3.6	1.7	AR15, WRC21/15
A5	M5	9.7	3.4	4.0	AR20
A6	M6	11.3	2.9	3.5	AR25
A8	M8	14.3	3.9	4.5	AR30, AR35
A12	M12	20.4	5.0	5.6	AR45

Installation Notice

Dimension of reference edge

To ensure the linear guide is precisely assembled with machine table, **cpc** machines a recess in the reference edge corner. The corner of the machine table must be smaller than the chamfer of the linear guide to avoid interference.

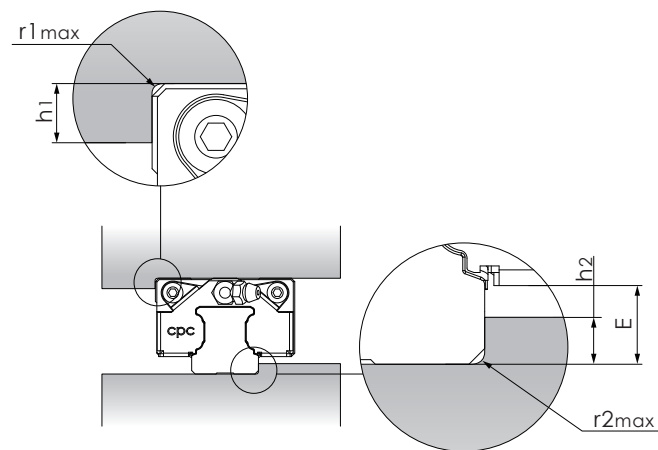

Unit : mm

ARC/HRC/ERC					
Type	r1max	r2max	h1	h2	E
15	0.5	0.5	4.0	2.5	3.3
20	0.5	0.5	5.0	4.0	5.0
25	1.0	1.0	5.0	5.0	6.0
30	1.0	1.0	6.0	5.5	6.6
35	1.0	1.0	6.0	6.5	7.6
45	1.0	1.0	8.0	8.0	9.3
55	1.5	1.5	10.0	10.0	12.0

WRC					
Type	r1max	r2max	h1	h2	E
21/15	0.4	0.4	5.0	2.0	2.7
27/20	0.4	0.4	5.0	3.0	3.5

Rail Joint


The standard length of rail is 4 meter, **cpc** provides rail joint solution. The joint number will be laser mark on the rail.

1. Follow the joint number to assemble. (Shown in figure A)
2. In the case of two more numbers of rail on the same moving axis, **cpc** suggests to set the joint in different position to avoid the change in accuracy. (Shown in figure B)
3. Follow the recommend tightening torques to fasten the screws from inside to outside.

Figure A



Figure B

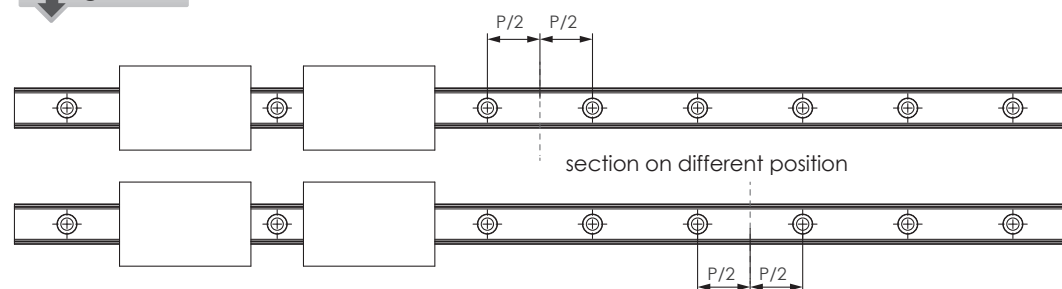

Technical information

Screw tightening torque (Nm)

Screw grade 12.9 Alloy Steel Screw	Steel	Cast Iron	Non Iron Metal
M3	2.0	1.3	1.0
M4	4.1	2.7	2.1
M5	8.8	5.9	4.4
M6	13.7	9.2	6.9
M8	30	20	15
M10	68	45	33
M12	118	78	59
M14	157	105	78
M16	196	131	98

Preload and clearance

The ARC/HRC/ERC linear guides provide 4 different preload class VC, V0, V1, V2.

ARC/WRC										
Class	Description	Preload Value	Clearance (μm)							Application
			15	20	25	30	35	45	55	
			WRC21/15	WRC27/20						
VC	Clearance	0	+5~+0	+5~+0	+5~+0	+5~+0	+5~+0	+5~+0	+5~+0	Smooth motion, low friction
V0	Light Preload	0.02C	+0~-4	+0~-5	+0~-6	+0~-7	+0~-8	+0~-10	+0~-12	For precision situations, smooth motion
V1	Medium Preload	0.05C	-4~-10	-5~-12	-6~-15	-7~-18	-8~-20	-10~-24	-12~-28	High stiffness, precision, high load situations
V2	Heavy Preload	0.08C	-10~-16	-12~-18	-15~-23	-18~-27	-20~-31	-24~-36	-28~-45	Super high stiffness, precision, super high load situations


HRC/ERC										
Class	Description	Preload Value	Clearance (μm)							Application
			15	20	25	30	35	45	55	
VC	Clearance	0	+5~+0	+5~+0	+5~+0	+5~+0	+5~+0	+5~+0	+5~+0	Smooth motion, low friction
V0	Light Preload	0.02C	+0~-4	+0~-5	+0~-6	+0~-7	+0~-8	+0~-10	+0~-12	For precision situations, smooth motion
V1	Medium Preload	0.08C	-4~-12	-5~-14	-6~-16	-7~-19	-8~-22	-10~-25	-12~-29	High stiffness, precision, high load situations
V2	Heavy Preload	0.13C	-11~-19	-14~-23	-16~-26	-19~-31	-22~-35	-25~-40	-29~-46	Super high stiffness, precision, super high load situations

Technical information


Accuracy

The ARC/HRC/ERC/WRC linear guides provide 5 different grades of precision : N, H, P, SP, and UP, Engineers can choose different grades depend on the machine applications.

Accuracy

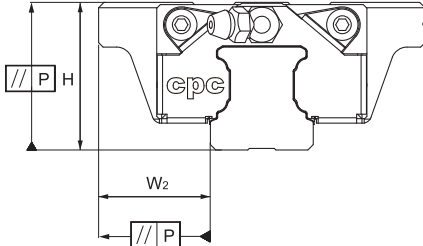	Table of accuracy						
	Accuracy grades (μm)		UP	SP	P	H	N
	Tolerance of dimension height H	H	±5	±10	±20	±40	±100
	Variation of height for different runner Block on the same position of Rail	ΔH	3	5	7	15	30
	Tolerance of dimension width W ₂	W ₂	±5	±7	±10	±20	±40
	Variation of width for different runner Block on the same position of Rail	ΔW ₂	3	5	7	15	30

Accuracy of the running parallelism

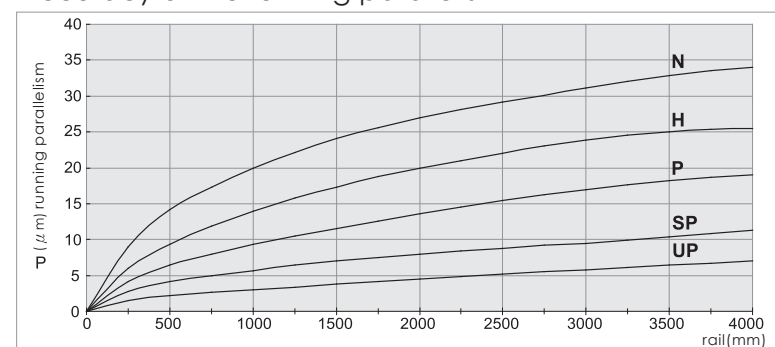

Application

class	Movement, Conveyance	Manufacturing Equipment	High Precision Manufacturing Equipment	Measuring Equipment
N	●	●		
H	●	●	●	
P		●	●	●
SP			●	●
UP				●
Examples	1. Conveyance system 2. Industrial robots 3. Office Machinery	1. Woodworking machine 2. Punching press 3. Injection Molding machine	1. Lathe/milling machine/ grinding machine 2. Electrical discharge machining (EDM) 3. CNC machining center	1. Three dimensional measuring instrument 2. Detection mirror/ head shaft 3. X-Y Table

Ordering information


Model code														
ARC	U	15	M	N	B	2	Z	C	V1	P	-1480L	-20	-20	II /J
											Customization code			
											Number of rails on the same moving axis			
											End hole pitch (mm)			
											Starting hole pitch (mm)			
											Rail length (mm)			
											Accuracy grade : UP, SP, P, H, N			
											Preload class : VC, V0, V1, V2			
											C: with ball chain (Available for size 15,20,25,30,35 and 45)			
											Z: with lubrication storage pad (Available for size 15,20,25,30,35 and 45)			
											Block quantity			
											Seal type : B: Low friction S: Standard			
											Block length : L: long N: standard S: short			
											Block width : M: standard F: flanged			
											Block type : 15, 20, 25, 30, 35, 45, 55			
											U: rail (tapped from the bottom)			
											Product type : ARC: automation series HRC/ERC: heavy load series			

Customization code(The meaning of suffix characters)

J : Butt-jointing track rail	R : Special process for rail	SG : Getting through the side grease holes and installed with the set screws
G : Customer designated lubricant	VD : Customized designated preload	MC : With metal caps for counter holes on the rail
I : With Inspection report	OA : Block install with grease nipple by cpc (Please contact cpc for direction of grease nipple installation)	MPC : With Metal-Plastic Caps for rail mounting holes.
S : Special straightness for rail	DE : Reference edges of block and rail on opposite sides	PC : With plastic caps for counter holes on the rail
B : Special process for block		
BL : With bellow for the rail		
SN : External NBR seal with Metal Scraper		
BR : Black chrome coating treatment on the rail	CR : Clear chrome coating treatment on the rail	RR : Raydent coating treatment on the rail
BB : Black chrome coating treatment on the block	CB : Clear chrome coating treatment on the block	RB : Raydent coating treatment on the block
BRB : Black chrome coating treatment on the block and rail	CRB : Clear chrome coating treatment on the block and rail	RRB : Raydent coating treatment on the block and rail
SB : With stainless steel ball bearings	NR : Nickel coating treatment on the rail	NB : Nickel coating treatment on the block
NRB : Nickel coating treatment on the block and rail		

Note: If there is any customization need, please contact **cpc** for more information.

Dimensions Table

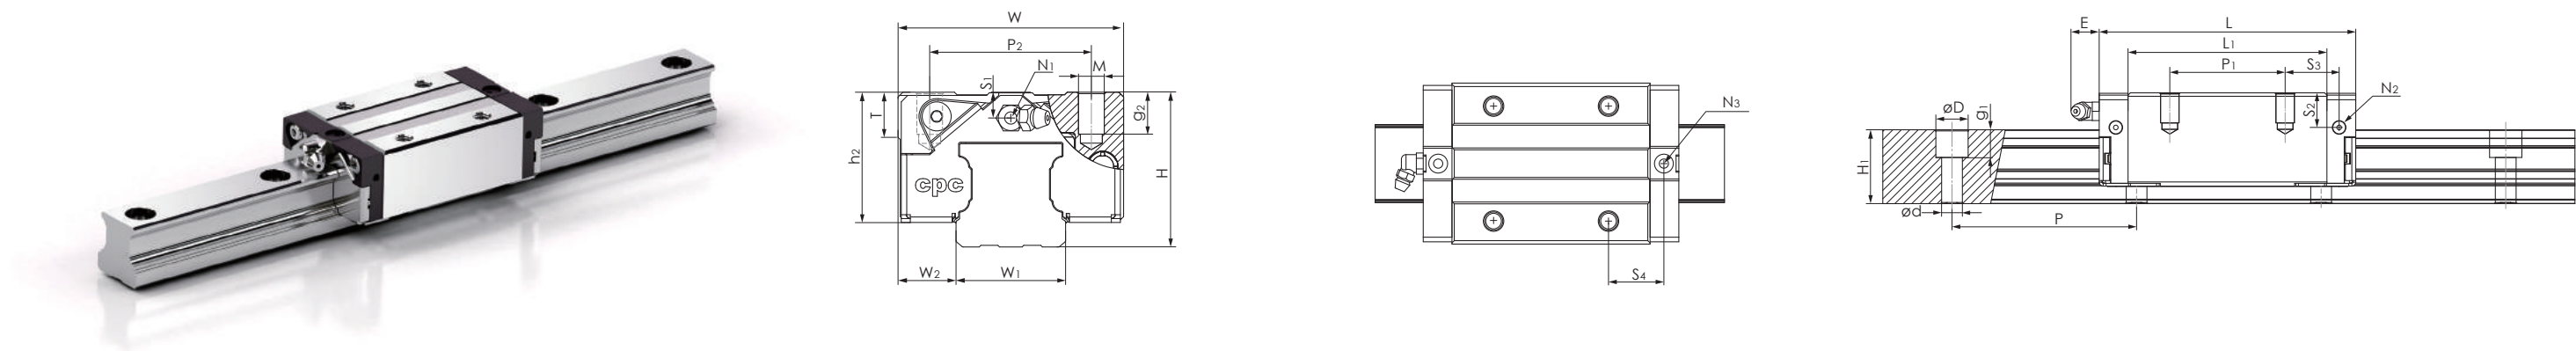

ARC MS Series

Model Code	Mounting Dimensions		Rail Dimensions(mm)				Block Dimensions(mm)											Block Dimensions(mm)								Load Capacities (kN)		Static Moment (Nm)			Weight		Model Code
	H	W ₂	W ₁	H ₁	P	Dx dxg ₁	W	L	L ₁	h ₂	P ₁	P ₂	P ₃	M x g ₂	M ₁	T	N ₁	N ₂	N ₃	E	S ₁	S ₂	S ₃	S ₄	C	C ₀	M _{r0}	M _{p0}	M _{y0}	Block(g)	Rail(g/m)		
ARC 15 MS	24	9.5	15	15	60	7.5x4.5x5.3	34	41.2	26	20.7	-	26	-	M4x7	-	6	M3x6.5	M3x6	P3	3.5	4.5	7.5	15.6	16.7	7.7	12.1	100	50	50	106	1290	ARC 15 MS	
ARC 20 MS	28	11	20	20	60	9.5x6x8.5	42	49.2	32.2	23	-	32	-	M5x7	-	8	M3x7.5	M3x5.5	P4	10	4	7.4	19.1	19.8	12.5	19.3	205	100	100	170	2280	ARC 20 MS	
ARC 25 MS	33	12.5	23	23	60	11x7x9	48	57.4	38.4	27	-	35	-	M6x9	-	8	M6x7.5	M3x6.5	P4	12	5	9.3	22.2	23.2	18.2	27.3	350	160	160	300	3020	ARC 25 MS	
ARC 30 MS	42	16	28	27	80	14x9x12	60	68	44	35.2	-	40	-	M8x10	-	12	M6x8.5	M6x5	P5	12	7.5	12	27	26.7	23.3	33.1	520	230	230	560	4380	ARC 30 MS	


ARC MN Series

ARC 15 MN	24	9.5	15	15	60	7.5x4.5x5.3	34	55.5	40.3	20.7	26	26	-	M4x7	-	6	M3x6.5	M3x6	P3	3.5	4.5	7.5	9.8	10.9	9.9	17.5	140	105	105	158	1290	ARC 15 MN
ARC 20 MN	28	11	20	20	60	9.5x6x8.5	42	69	52	23	32	32	-	M5x7	-	8	M3x7.5	M3x5.5	P4	10	4	7.4	13	13.7	17.1	30.0	325	230	230	266	2280	ARC 20 MN
ARC 25 MN	33	12.5	23	23	60	11x7x9	48	81.2	62.2	27	35	35	-	M6x9	-	8	M6x7.5	M3x6.5	P4	12	5	9.3	16.6	17.6	24.8	42.5	540	385	385	420	3020	ARC 25 MN
ARC 30 MN	42	16	28	27	80	14x9x12	60	95.5	71.5	35.2	40	40	-	M8x10	-	12	M6x8.5	M6x5	P5	12	7.5	12	20.8	20.5	32.8	53.7	845	565	565	800	4380	ARC 30 MN
ARC 35 MN	48	18	34	32	80	14x9x12	70	111.2	86.2	40.4	50	50	-	M8x13	-	14	M6x10	M6x7	P5	12	8	15	23.4	24.1	45.9	82.9	1700	1080	1080	1120	6790	ARC 35 MN
ARC 45 MN	60	20.5	45	39	105	20x14x17	86	135.5	102.5	50.7	60	60	-	M10x17	-	14	PT1/8x12.5	M6x10.5	P5	14	11.1	18.1	27.3	27.2	71.3	122.1	3200	1910	1910	2120	10530	ARC 45 MN
ARC 55 MN	70	23.5	53	45.7	120	24x16x20	100	168.5	126.5	58	75	75	-	M12x20	-	16	M6x10	M6x13	P5	12	13.5	23.5	34.8	33.8	128	186	4949	3278	3278	4200	14000	ARC 55 MN

ARC ML Series


ARC 15 ML	24	9.5	15	15	60	7.5x4.5x5.3	34	76.2	61	20.7	34	26	-	M4x7	-	6	M3x6.5	M3x6	P3	3.5	4.5	7.5	16.1	17.2	13.4	26.9	215	235	235	240	1290	ARC 15 ML
ARC 20 ML	28	11	20	20	60	9.5x6x8.5	42	87.2	70.2	23	45	32	-	M5x7	-	8	M3x7.5	M3x5.5	P4	10	4	7.4	15.6	16.3	20.4	38.5	415	390	390	330	2280	ARC 20 ML
ARC 30 ML	42	16	28	27	80	14x9x12	60	118	94	35.2	60	40	-	M8x10	-	12	M6x8.5	M6x5	P5	12	8.7	12	21.7	21.7	39.6	70.2	1105	950	950	1138	4380	ARC 30 ML
ARC 35 ML	48	18	34	32	80	14x9x12	70	136.6	111.6	40.4	72	50	-	M8x13	-	14	M6x10	M6x7	P5	12	8	15	25.1	25.8	54.7	106.5	2185	1755	1755	1536	6790	ARC 35 ML
ARC 45 ML	60	20.5	45	39	105	20x14x17	86	171.5	138.5	50.7	80	60	-	M10x17	-	14	PT1/8x12.5	M6x10.5	P5	14	11.1	18.1	35	35	89.5	169.1	4430	3460	3460	3160	10530	ARC 45 ML
ARC 55 ML	70	23.5	53	45.7	120	24x16x20	100	202	160	58	95	75	-	M12x20	-	16	M6x10	M6x13	P5	12	13.5	23.5	41.5	40.5	147	226	6472	5284	5284	5083	14000	ARC 55 ML

1. The load capacities is for full-ball type (without ball chain)
2. N₂ = Injecting holes
3. N₃ = O-ring size for lubrication from above
4. N₂, N₃ will be seal before shipment, open it when using product.

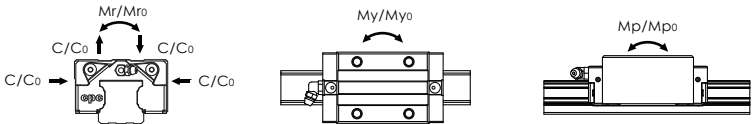

The above rating load capacities and static moment are calculated according to ISO 14728 standard. The rating life for basic dynamic load rating is defined as the total 100km travel distance that 90% of a group of identical linear guides can be operated individually under the same conditions free from any material damage caused by rolling fatigue. When the standard of 50km travel distance is applied, the above basic dynamic load rating C of ISO 14728 should be multiplied by 1.26 for conversion.

Dimensions Table

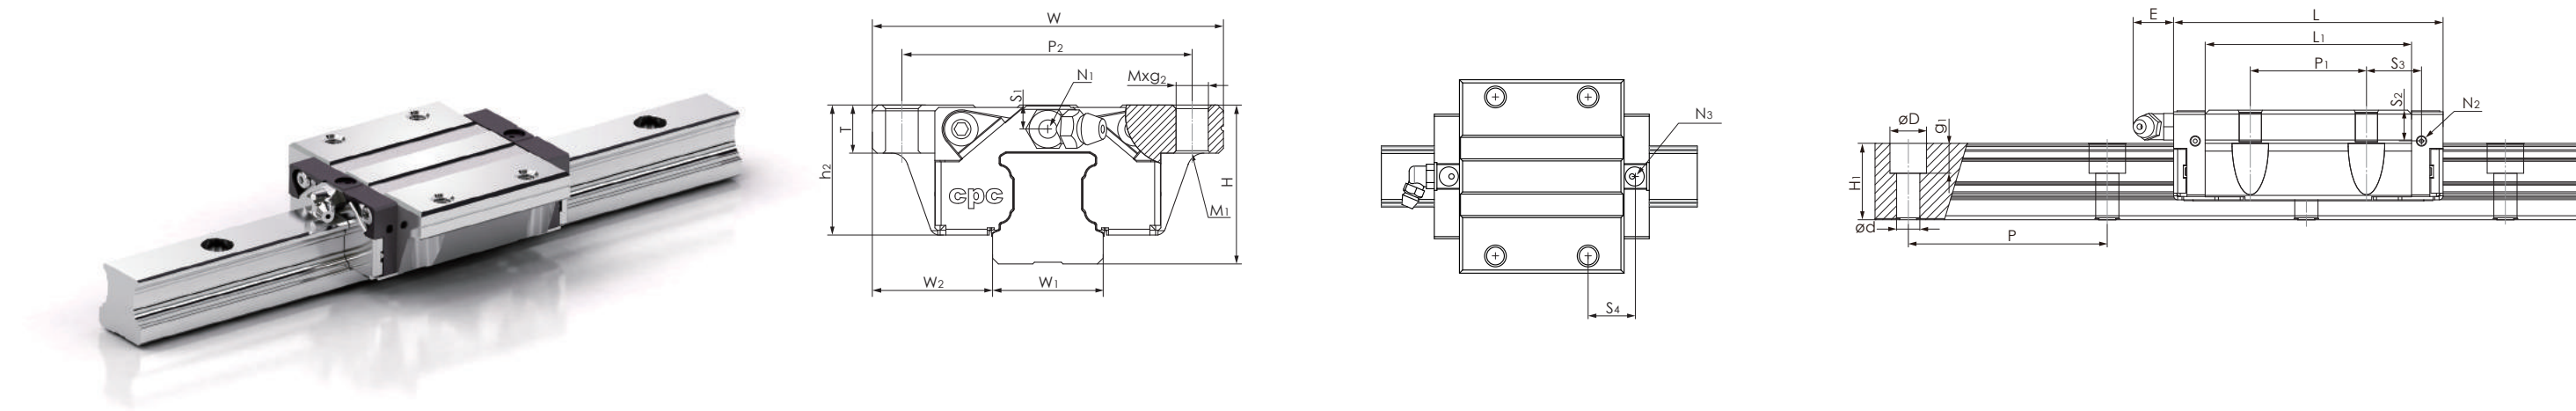

ARC FS Series


Model Code	Mounting Dimensions		Rail Dimensions(mm)				Block Dimensions(mm)											Block Dimensions(mm)								Load Capacities (KN)		Static Moment (Nm)			Weight		Model Code
	H	W ₂	W ₁	H ₁	P	Dxdxg ₁	W	L	L ₁	h ₂	P ₁	P ₂	P ₃	Mxg ₂	M ₁	T	N ₁	N ₂	N ₃	E	S ₁	S ₂	S ₃	S ₄	C	C ₀	M _{r0}	M _{p0}	M _{y0}	Block(g)	Rail(g/m)		
ARC 15 FS	24	18.5	15	15	60	7.5x4.5x5.3	52	41.2	26	20.7	-	41	-	M5x7	M4	7	M3x6.5	M3x6	P3	3.5	4.5	7.5	15.6	16.7	7.7	12.1	100	50	50	132	1290	ARC 15 FS	
ARC 20 FS	28	19.5	20	20	60	9.5x6x8.5	59	49.2	32.2	23	-	49	-	M6x10	M5	10	M3x7.5	M3x5.5	P4	10	4	7.4	19.1	19.8	12.5	19.3	205	100	100	210	2280	ARC 20 FS	
ARC 25 FS	33	25	23	23	60	11x7x9	73	57.4	38.4	27	-	60	-	M8x12	M6	12	M6x7.5	M3x6.5	P4	12	5	9.3	22.2	23.2	18.2	27.3	350	160	160	345	3020	ARC 25 FS	
* ARC 30 FS	42	31	28	27	80	14x9x12	90	68	44	35.2	-	72	-	M10x15	M8	15	M6x8.5	M6x5	P5	12	7.5	12	27	26.8	23.3	33.1	520	230	230	750	4380	ARC 30 FS	

ARC FN Series

ARC 15 FN	24	18.5	15	15	60	7.5x4.5x5.3	52	55.5	40.3	20.7	26	41	-	M5x7	M4	7	M3x6.5	M3x6	P3	3.5	4.5	7.5	8.9	10.9	9.9	17.5	140	105	105	200	1290	ARC 15 FN
ARC 20 FN	28	19.5	20	20	60	9.5x6x8.5	59	69	52	23	32	49	-	M6x10	M5	10	M3x7.5	M3x5.5	P4	10	4	7.4	13	13.7	17.1	30.0	325	230	230	336	2280	ARC 20 FN
ARC 25 FN	33	25	23	23	60	11x7x9	73	81.2	62.2	27	35	60	-	M8x12	M6	12	M6x7.5	M3x6.5	P4	12	5	9.3	16.6	17.6	24.8	42.5	540	385	385	524	3020	ARC 25 FN
ARC 30 FN	42	31	28	27	80	14x9x12	90	95.5	71.5	35.2	40	72	-	M10x15	M8	15	M6x8.5	M6x5	P5	12	7.5	12	20.8	20.5	32.8	53.7	845	565	565	1200	4380	ARC 30 FN
ARC 35 FN	48	33	34	32	80	14x9x12	100	111.2	86.2	40.4	50	82	-	M10x15	M8	15	M6x10	M6x7	P5	12	8	15	23.4	24.1	45.9	82.9	1700	1080	1080	1580	6790	ARC 35 FN




1. The model is in design
3. N2 = Injecting holes
5. N2, N3 will be seal before shipmant, open it when using product.

2. The load capacities is for full-ball type (without ball chain)
4. N3 = O-ring size for lubrication from above

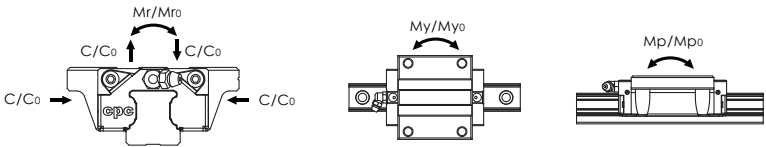

The above rating load capacities and static moment are calculated according to ISO 14728 standard. The rating life for basic dynamic load rating is defined as the total 100km travel distance that 90% of a group of identical linear guides can be operated individually under the same conditions free from any material damage caused by rolling fatigue. When the standard of 50km travel distance is applied, the above basic dynamic load rating C of ISO 14728 should be multiplied by 1.26 for conversion.

Dimensions Table

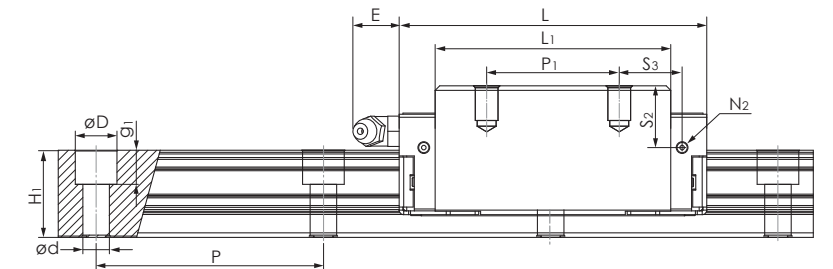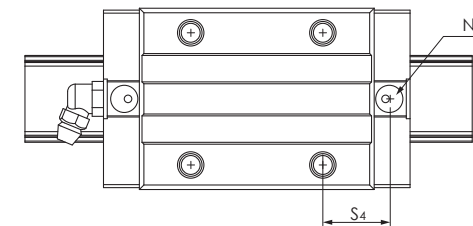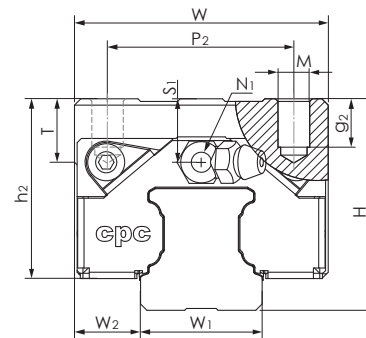

HRC MN Series

Model Code	Mounting Dimensions		Rail Dimensions(mm)				Block Dimensions(mm)											Block Dimensions(mm)								Load Capacities (kN)		Static Moment (Nm)			Weight		Model Code
	H	W2	W1	H1	P	Dx dx g1	W	L	L1	h2	P1	P2	P3	M x g2	M1	T	N1	N2	N3	E	S1	S2	S3	S4	C	C0	Mr0	Mp0	My0	Block(g)	Rail(g/m)		
HRC 15 MN	28	9.5	15	15	60	7.5x4.5x5.3	34	55.5	40.3	24.7	26	26	-	M4x7	-	6	M3x6.5	M3x6	P3	3.5	8.5	11.5	9.8	10.9	9.9	17.5	140	105	105	200	1290	HRC 15 MN	
HRC 20 MN	30	12	20	20	60	9.5x6x8.5	44	69	52	25	36	32	-	M5x8.5	-	8	M3x7.5	M3x5.5	P4	10	6	9.4	11	11.7	17.1	30.0	325	230	230	318	2280	HRC 20 MN	
HRC 25 MN	40	12.5	23	23	60	11x7x9	48	81.2	62.2	34	35	35	-	M6x9	-	12	M6x7.5	M3x6.5	P4	12	12	16.3	16.6	17.6	24.8	42.5	540	385	385	578	3020	HRC 25 MN	
HRC 30 MN	45	16	28	27	80	14x9x12	60	95.5	71.5	38.4	40	40	-	M8x12	-	12	M6x8.5	M6x5	P5	12	10.5	15	20.8	20.5	32.8	53.7	845	565	565	896	4380	HRC 30 MN	
HRC 35 MN	55	18	34	32	80	14x9x12	70	111.2	86.2	47.4	50	50	-	M8x13	-	14	M6x10	M6x7	P5	12	15	22	23.4	24.1	45.9	82.9	1700	1080	1080	1430	6790	HRC 35 MN	
HRC 45 MN	70	20.5	45	39	105	20x14x17	86	135.5	102.5	60.7	60	60	-	M10x20	-	14	PT1/8x12.5	M6x10.5	P5	14	21.1	28.1	27.3	27.3	71.3	122.1	3200	1910	1910	2794	10530	HRC 45 MN	
HRC 55 MN	80	23.5	53	45.7	120	24x16x20	100	168.5	126.5	68	75	75	-	M12x25	-	16	M6x10	M6x13	P5	12	23.5	33.5	34.8	33.8	128	186	4949	3278	3278	5110	14000	HRC 55 MN	

HRC ML Series

HRC 15 ML	28	9.5	15	15	60	7.5x4.5x5.3	34	76.2	61	24.7	26	26	-	M4x7	-	6	M3x6.5	M3x6	P3	3.5	8.5	11.5	20.1	21.2	13.4	26.9	215	235	235	300	1290	HRC 15 ML
HRC 20 ML	30	12	20	20	60	9.5x6x8.5	44	87.2	70.2	25	50	32	-	M5x8.5	-	8	M3x7.5	M3x5.5	P4	10	6	9.4	13.1	13.8	20.4	38.5	415	390	390	400	2280	HRC 20 ML
HRC 25 ML	40	12.5	23	23	60	11x7x9	48	105	86	34	50	35	-	M6x9	-	12	M6x7.5	M3x6.5	P4	12	12	16.3	21	22	30.7	57.7	735	710	710	685	3020	HRC 25 ML
HRC 30 ML	45	16	28	27	80	14x9x12	60	118	94	38.4	60	40	-	M8x12	-	12	M6x8.5	M6x5	P5	12	10.5	15	21.7	21.8	39.6	70.2	1105	950	950	1150	4380	HRC 30 ML
HRC 35 ML	55	18	34	32	80	14x9x12	70	136.6	111.6	47.4	72	50	-	M8x13	-	14	M6x10	M6x7	P5	12	15	22	25.1	25.8	54.7	106.5	2185	1755	1755	1953	6790	HRC 35 ML
HRC 45 ML	70	20.5	45	39	105	20x14x17	86	171.5	138.5	60.7	80	60	-	M10x20	-	14	PT1/8x12.5	M6x10.5	P5	14	21.1	28.1	35	35	89.5	169.1	4430	3460	3460	4060	10530	HRC 45 ML
HRC 55 ML	80	23.5	53	45.7	120	24x16x20	100	202	160	68	95	75	-	M12x25	-	16	M6x10	M6x13	P5	12	23.5	33.5	41.5	40.5	147	226	6472	5284	5284	6243	14000	HRC 55 ML

ERC Series


ERC 25 MS	36	12.5	23	23	60	11x7x9	48	57.4	38.4	30	-	35	-	M6x9	-	8	M6x7.5	M3x6.5	P4	12	8	12.3	22.2	23.2	18.2	27.3	350	160	160	315	3020	ERC 25 MS
ERC 25 MN	36	12.5	23	23	60	11x7x9	48	81.2	62.2	30	35	35	-	M6x9	-	8	M6x7.5	M3x6.5	P4	12	8	12.3	16.6	17.6	24.8	42.5	540	385	385	470	3020	ERC 25 MN
ERC 25 M L	36	12.5	23	23	60	11x7x9	48	105	86	30	50	35	-	M6x9	-	8	M6x7.5	M3x6.5	P4	12	8	12.3	21	22	30.7	57.7	735	710	710	610	3020	ERC 25 M L

1. The load capacities is for full-ball type (without ball chain)

3. N3 = O-ring size for lubrication from above




2. N2 = Injecting holes

4. N2, N3 will be seal before shipment, open it when using product.

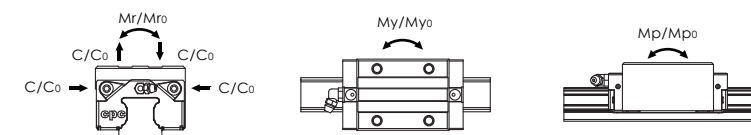

The above rating load capacities and static moment are calculated according to ISO14728 standard. The rating life for basic dynamic load rating is defined as the total 100km travel distance that 90% of a group of identical linear guides can be operated individually under the same conditions free from any material damage caused by rolling fatigue. When the standard of 50km travel distance is applied, the above basic dynamic load rating C of ISO 14728 should be multiplied by 1.26 for conversion.


Dimensions Table

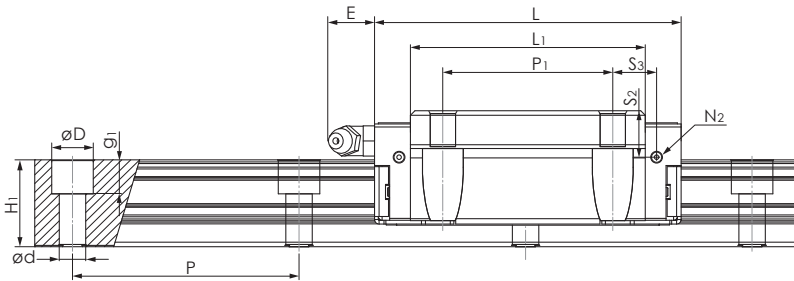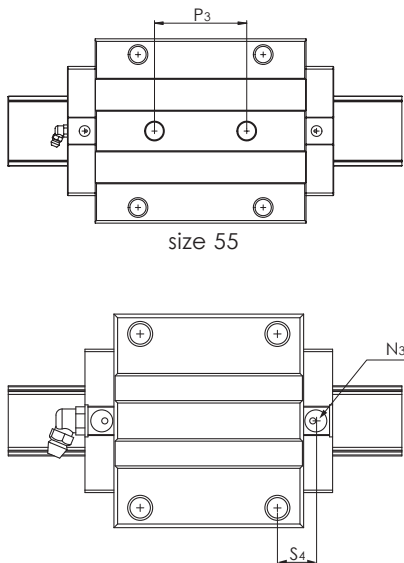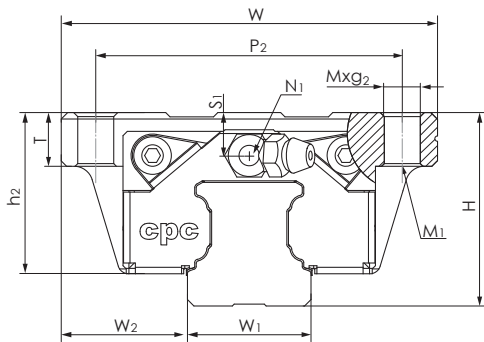

Model Code	Mounting Dimensions		Rail Dimensions(mm)				Block Dimensions(mm)											Block Dimensions(mm)								Load Capacities (kN)		Static Moment (Nm)			Weight		Model Code
	H	W ₂	W ₁	H ₁	P	Dx dx g ₁	W	L	L ₁	h ₂	P ₁	P ₂	P ₃	Mx g ₂	M ₁	T	N ₁	N ₂	N ₃	E	S ₁	S ₂	S ₃	S ₄	C	C ₀	M _{r0}	M _{p0}	M _{y0}	Block(g)	Rail(g/m)		
HRC 15 FN	24	16	15	15	60	7.5x4.5x5.3	47	55.5	40.3	20.7	30	38	-	M5x7	M4	7	M3x6.5	M3x6	P3	3.5	4.5	7.5	7.8	8.9	9.9	17.5	140	105	105	190	1290	HRC 15 FN	
HRC 20 FN	30	21.5	20	20	60	9.5x6x8.5	63	69	52	25	40	53	-	M6x10	M5	10	M3x7.5	M3x5.5	P4	10	6	9.4	9	9.7	17.1	30.0	325	230	230	396	2280	HRC 20 FN	
HRC 25 FN	36	23.5	23	23	60	11x7x9	70	81.2	62.2	30	45	57	-	M8x12	M6	12	M6x7.5	M3x6.5	P4	12	8	12.3	11.6	12.6	24.8	42.5	540	385	385	626	3020	HRC 25 FN	
HRC 30 FN	42	31	28	27	80	14x9x12	90	95.5	71.5	35.2	52	72	-	M10x15	M8	16	M6x8.5	M6x5	P5	12	7.5	12	14.8	14.5	32.8	53.7	845	565	565	1110	4380	HRC 30 FN	
HRC 35 FN	48	33	34	32	80	14x9x12	100	111.2	86.2	40.4	62	82	-	M10x15	M8	16	M6x10	M6x7	P5	12	8	15	17.4	18.1	45.9	82.9	1700	1080	1080	1550	6790	HRC 35 FN	
HRC 45 FN	60	37.5	45	39	105	20x14x17	120	135.5	102.5	50.7	80	100	-	M12x18	M10	19	PT1/8x12.5	M6x10.5	P5	14	11.1	18.1	17.3	17.3	71.3	122.1	3200	1910	1910	2747	10530	HRC 45 FN	
HRC 55 FN	70	43.5	53	45.7	120	24x16x20	140	168.5	126.5	58	95	116	70	M14x18	M12	18	M6x10	M6x13	P5	12	13.5	23.5	24.8	23.8	128	186	4949	3278	3278	5440	14000	HRC 55 FN	

HRC 20 FL	30	21.5	20	20	60	9.5x6x8.5	63	87.2	70.2	25	40	53	-	M6x10	M5	10	M3x7.5	M3x5.5	P4	10	6	9.4	18.1	18.8	20.4	38.5	415	390	390	504	2280	HRC 20 FL
HRC 25 FL	36	23.5	23	23	60	11x7x9	70	105	86	30	45	57	-	M8x12	M6	12	M6x7.5	M3x6.5	P4	12	8	12.3	23.5	24.5	30.7	57.5	735	710	710	870	3020	HRC 25 FL
HRC 30 FL	42	31	28	27	80	14x9x12	90	118	94	35.2	52	72	-	M10x15	M8	16	M6x8.5	M6x5	P5	12	7.5	12	25.7	25.8	39.6	70.2	1105	950	950	1385	4380	HRC 30 FL
HRC 35 FL	48	33	34	32	80	14x9x12	100	136.6	111.6	40.4	62	82	-	M10x15	M8	16	M6x10	M6x7	P5	12	8	15	30.1	30.8	54.7	106.5	2185	1755	1755	2000	6790	HRC 35 FL
HRC 45 FL	60	37.5	45	39	105	20x14x17	120	171.5	138.5	50.7	80	100	-	M12x18	M10	19	PT1/8x12.5	M6x10.5	P5	14	11.1	18.1	35	35	89.5	169.1	4430	3460	3460	4280	10530	HRC 45 FL
HRC 55 FL	70	43.5	53	45.7	120	24x16x20	140	202	160	58	95	116	70	M14x18	M12	18	M6x10	M6x13	P5	12	13.5	23.5	41.5	40.5	147	226	6472	5284	5284	6963	14000	HRC 55 FL

1. The load capacities is for full-ball type (without ball chain)
2. N2 = Injecting holes
3. N3 = O-ring size for lubrication from above
4. N2, N3 will be seal before shipment, open it when using product.

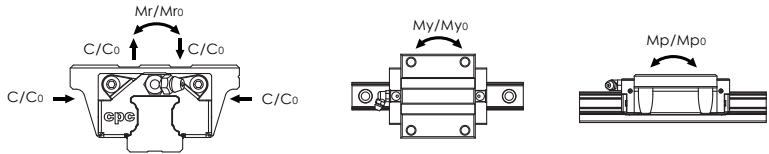

The above rating load capacities and static moment are calculated according to ISO 14728 standard. The rating life for basic dynamic load rating is defined as the total 100km travel distance that 90% of a group of identical linear guides can be operated individually under the same conditions free from any material damage caused by rolling fatigue. When the standard of 50km travel distance is applied, the above basic dynamic load rating C of ISO 14728 should be multiplied by 1.26 for conversion.

Product Overview

AR/HR/ER Lightweight Linear Guide Product Characteristics

cpc lightweight Ball Type Linear Guide Series adopt the O-type arrangement for the four row ball circulation design featuring high load and high stiffness. The contact angle between the rail and the ball is 45 degrees and realizes the 4 directions equal load capacity.

Among the AR/HR/ER Lightweight Linear Guide, two of the four circulation channels are positioned within the plastic accessories, reducing 10~20% of the block weight.

Stainless steel reinforcement plate has scraper function and the L design fastens the screws onto the top and bottom of the runner block, which reinforces the rigidity of end caps and cladding; further enables the high speed movement of products.

AR/HR/ER Lightweight Linear Guide mainly provide the preload class VC and V0 etc. to enhance the tolerance of dimension and convenience of customers' processed components and even reduce the cost of manufacturing work.


- Tolerance of velocity

■ Four directions equal load capacity

■ Adopting the same rail with ARC/HRC/ERC
- Lightweight block rotary hole design

■ Processed accessories match tolerance of dimension

■ Available for vertical (downward) and reverse (upward) bolting track rail

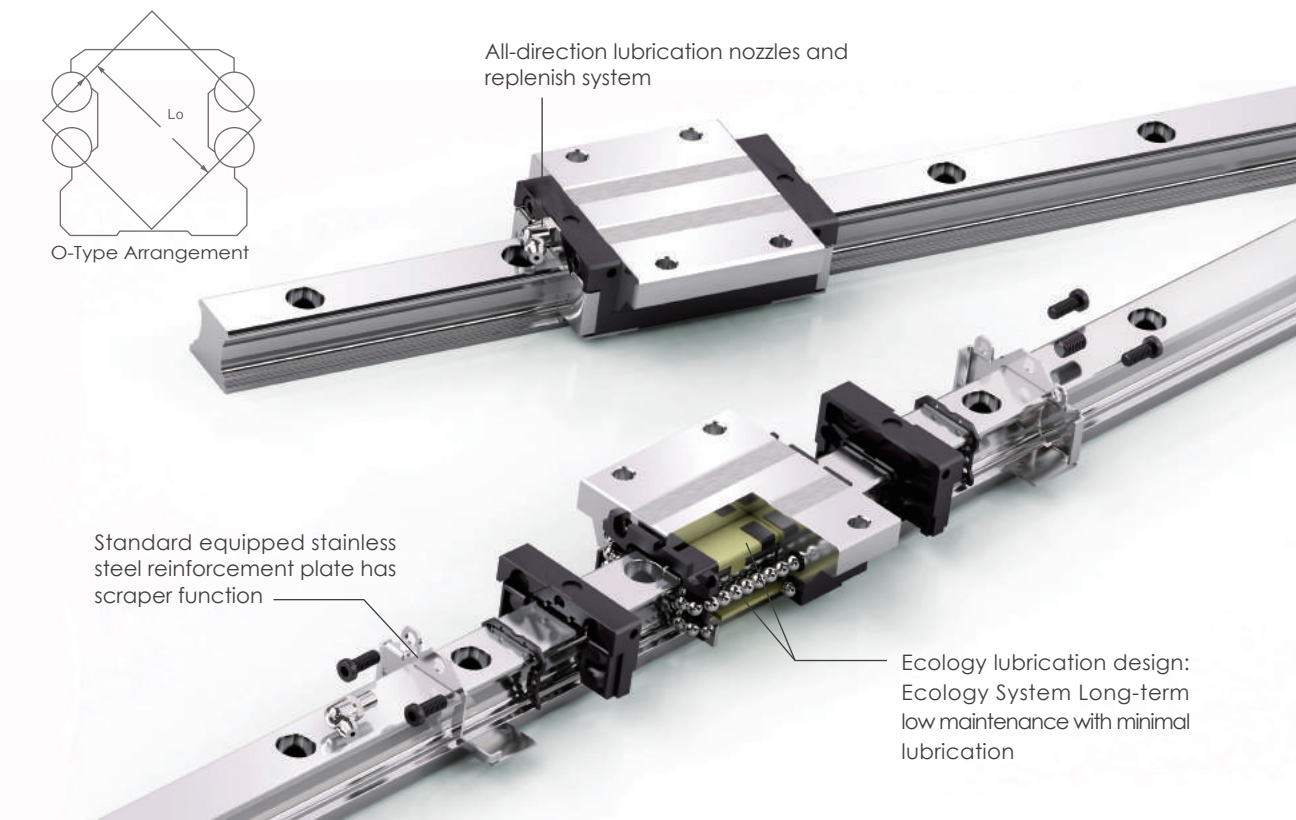

- Available for special surface treatment
- Excellent dynamic performance: Reach $V_{max} > 5m/s$ Reach $a_{max} > 300m/s^2$
- Dust protection of double wipe blade design in the end seal; have Standard type and reinforcement type

Technical information

Accuracy

Table of accuracy				
	Accuracy grades (μm)		H	N
	Tolerance of dimension height H	H	±40	±100
	Variation of height for different runner Block on the same position of Rail	ΔH	15	30
	Tolerance of dimension width W ₂	W ₂	±20	±40
	Variation of width for different runner Block on the same position of Rail	ΔW ₂	15	30

Please refer to P16 : Accuracy of the running parallelism graph




Preload and clearance

AR/HR/ER						
Class	Description	Preload Value	Clearance (μm)			Application
			15	20	25	
VC	Clearance	0	+10~-2	+10~-2	+11~-3	Smooth motion, low friction
V0	Light preload	0.02C	+2~-4	+2~-5	+3~-6	For precision situations, smooth motion

Ordering information

AR	U	15	M	N	B	2	Z	V0	H	-1480L	-20	-20	II	/J	
															Customization code (Please refer to P14)
															Number of rails on the same moving axis
															End hole pitch (mm)
															Starting hole pitch (mm)
															Rail length (mm)
															Accuracy grade : H, N
															Preload class : VC, V0
															Z: with lubrication storage pad
															Block quantity
															Seal type : B: Low friction S: Standard
															Block length : L: long N: standard S: short
															Block width : M: standard F: flanged
															Block type : 15, 20, 25
															U: rail (tapped from the bottom)
															Product type : AR: automation series HR/ER: heavy load series

Dimensions Table

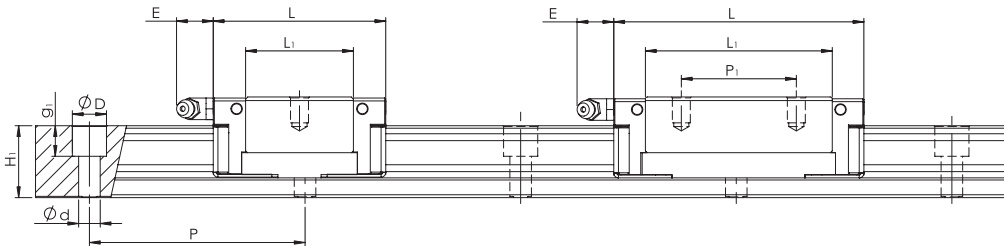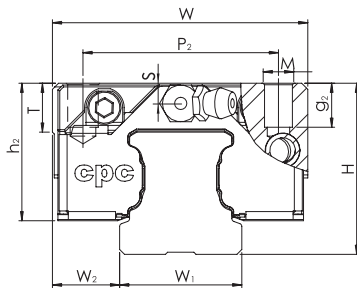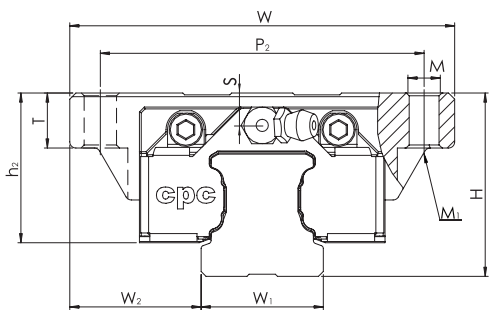

AR Series


Model Code	Mounting Dimensions		Rail Dimensions(mm)				Block Dimensions(mm)							Block Dimensions(mm)				Load Capacities (KN)			Static Moment (Nm)			Weight		Model Code
	H	W ₂	W ₁	H ₁	P	Dxdxg ₁	W	L	L ₁	h ₂	P ₁	P ₂	E	Mxg ₂	M ₁	S	T	C _{ISO}		C ₀	M _{r0}	M _{p0}	M _{y0}	Block(g)	Rail(g/m)	
																		100km	50km							
AR 15 FS	24	18.5	15	15	60	7.5x4.5x5.3	52	40.8	24.2	20.1	-	41	4.5	M5x7	M4	4	7	6.4	8.1	10.8	80	40	40	120	1290	AR 15 FS
AR 15 FN	24	18.5	15	15	60		52	56.1	39.5	20.1	26	41	4.5	M5x7	M4	4	7	9.0	11.3	17.5	140	100	100	180		AR 15 FN
AR 20 MS	28	11	20	20	60	9.5x6x8.5	42	48.2	30	22.5	-	32	12	M5x7	-	3.5	8	10.9	13.7	16.3	170	80	80	148	2280	AR 20 MS
AR 20 FS	28	19.5	20	20	60		59	48.2	30	22.5	-	49	12	M6x9	M5	3.5	9	10.9	13.7	16.3	170	80	80	185		AR 20 FS
AR 20 FN	28	19.5	20	20	60		59	70.2	52	22.5	32	49	12	M6x9	M5	3.5	9	15.6	19.7	29.8	310	220	220	299		AR 20 FN
AR 25 MS	33	12.5	23	23	60	11x7x9	48	57.2	37	26.6	-	35	12	M6x9	-	5	8	12.3	15.5	21.2	220	110	110	285	3020	AR 25 MS
AR 25 MN	33	12.5	23	23	60		48	80.2	60	26.6	35	35	12	M6x9	-	5	8	18.8	23.7	36.4	410	300	300	380		AR 25 MN
AR 25 FS	33	25	23	23	60		73	57.2	37	26.6	-	60	12	M8x10	M6	5	10	12.3	15.5	21.2	220	110	110	325		AR 25 FS

HR Series

HR 20 FL	30	21.5	20	20	60	9.5x6x8.5	63	90.2	72	24.5	40	53	12	M6x9	M5	5.5	9	20.8	26.2	43.3	430	420	420	496	2280	HR 20 FL
HR 25 MN	40	12.5	23	23	60	11x7x9	48	80.2	60	33.6	35	35	12	M6x9	-	12	12	18.8	23.7	36.4	410	300	300	530	3020	HR 25 MN
HR 25 FL	36	23.5	23	23	60		70	100.2	80	29.6	45	57	12	M8x10	M6	8	10	23.4	29.5	48.5	560	520	520	585		HR 25 FL


ER Series

ER 25 MN	36	12.5	23	23	60	11x7x9	48	80.2	60	29.6	35	35	12	M6x9	-	8	8	18.8	23.7	36.4	410	300	300	432	3020	ER 25 MN
----------	----	------	----	----	----	--------	----	------	----	------	----	----	----	------	---	---	---	------	------	------	-----	-----	-----	-----	------	----------

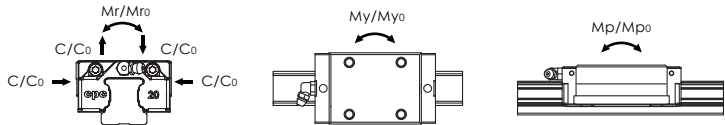

The above rating load capacities and static moment are calculated according to ISO14728 standard. The rating life for basic dynamic load rating is defined as the total 100km travel distance that 90% of a group of identical linear guides can be operated individually under the same conditions free from any material damage caused by rolling fatigue. When the standard of 50km travel distance is applied, the above basic dynamic load rating C of ISO 14728 should be multiplied by 1.26 for conversion.

Dimensions Table

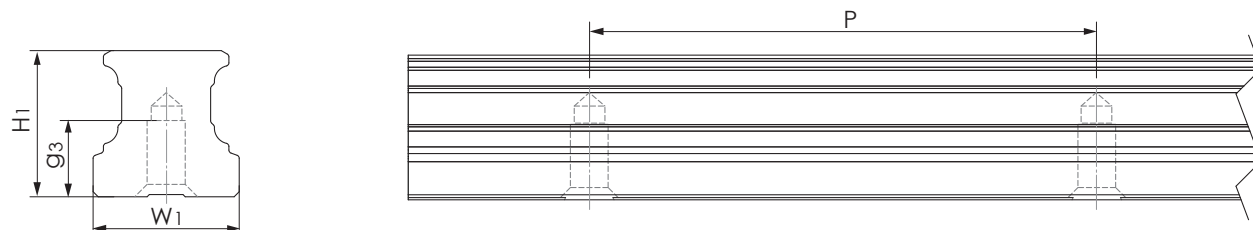

Rail (tapped from the bottom)

Model Code	W1	H1	P	Mxg3	Lmax	Rail(g/m)
ARU 15	15	15	60	M5x8	4000	1290
ARU 20	20	20	60	M6x10	4000	2280
ARU 25	23	23	60	M6x12	4000	3020
ARU 30	28	27	80	M8x15	4000	4380
ARU 35	34	32	80	M8x15	4000	6790
ARU 45	45	39	105	M12x19	4000	10530
ARU 55	53	45.7	120	M14x24	4000	14060

Nipple Option

Type			Nipple size		Grease nipple	Optional			
			Section	Side		Straight adapter	Tube diameter	L-Type adapter	Tube diameter
ARC15	HRC15	-	M3	M3	A-M3	OA-M3-D4	-	OB-M3-M6	-
ARC20	HRC20	-	M3	M3	B-M3	OA-M3-D4	-	OB-M3-M6	-
ARC25	HRC25	ERC25	M6	M3	B-M6	OA-M6-M8	Ø4	OB-M6-M8	Ø4
ARC30	HRC30	-	M6	M6	B-M6	OA-M6-M8	Ø4	OB-M6-M8	Ø4
						OA-M6-PT1/8	-	OB-M6-PT1/8	-
						OA-M6-G1/8	Ø6	OB-M6-PT1/8	-
ARC35	HRC35	-	M6	M6	B-M6	OA-M6-M8	Ø4	OB-M6-M8	-
						OA-M6-PT1/8	-	OB-M6-PT1/8	-
						OA-M6-G1/8	Ø6	OB-M6-PT1/8	-
ARC45	HRC45	-	PT1/8	M6	B-PT1/8	OA-PT1/8-M8	Ø4	OB-PT1/8-M8	Ø4
						OA-PT1/8-PT1/8	-	OB-PT1/8-PT1/8	-
						OA-PT1/8-G1/8	Ø6	OB-PT1/8-PT1/8	-
ARC55	HRC55	-	M6	M6	B-M6	OA-M6-M8	Ø4	OB-M6-M8	Ø4
						OA-M6-PT1/8	-	OB-M6-PT1/8	-
						OA-M6-G1/8	Ø6	OB-M6-PT1/8	-



WRC series
Wide Rail Ball Type Linear Guide Series


Ordering information

Model code

WRC	U	21/15	M	N	B	2	C	V1	P	-1480L	-20	-20	II	/J	Customization code (Please refer to page 14)				
															Number of rails on the same moving axis				
															End hole pitch (mm)				
															Starting hole pitch (mm)				
															Rail length (mm)				
															Accuracy grade : UP, SP, P, H, N (Please refer to page 13)				
															Preload class : VC, V0, V1, V2 (Please refer to page 12)				
															C: with ball chain (Please refer to page 07)				
															Block quantity				
															Seal type : B: Low friction				
															Block length : N: standard				
															Block width : M: standard F: flanged				
															Block type : 21/15, 27/20				
															U: rail (tapped from the bottom)				
															Product type : WRC: Wide Rail Ball Type Linear Guide Series				





Dimensions Table

WRU Series Rail (tapped from the bottom)

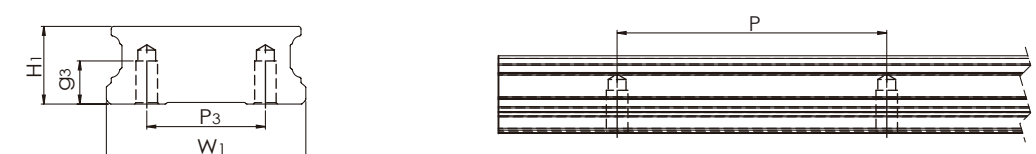

Model Code	W1	H1	P	P3	Mxg3	Lmax	Rail(g/m)
WRU 21/15	37	14.4	50	22	M4x8	4000	3596
WRU 27/20	42	18.5	60	24	M5x7.5	4000	5259

Dimensions Table

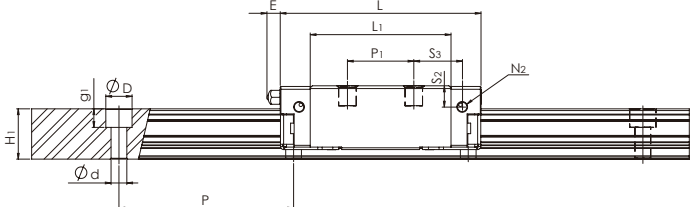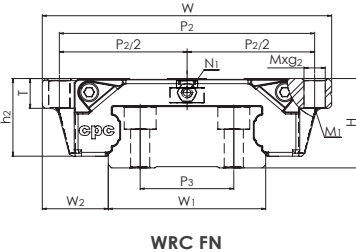


WRC Series

Model Code	Mounting Dimensions		Rail Dimensions(mm)					Block Dimensions(mm)										Block Dimensions(mm)								Load Capacities (KN)			Static Moment (Nm)			Weight		Model Code
	H	W ₂	W ₁	H ₁	P	P ₃	D _x d _x g ₁	W	L	L ₁	h ₂	P ₁	P ₂	M _x g ₂	M ₁	T	N ₁	N ₂	N ₃	E	S ₁	S ₂	S ₃	S ₄	C _{iso}		C ₀	M _{r0}	M _{p0}	M _{y0}	Block(g)	Rail(g/m)		
																									100km	50km								
WRC 21/15 MN	21	8.5	37	14.4	50	22	7.5x4.5x5.3	54	57.5	40.3	18.3	19	31	M5x5	-	6	M3	M3x3	P3	3.5	3.3	6.1	13.9	11.9	9.9	12.5	17.5	315	105	105	160	3596	WRC 21/15 MN	
WRC 21/15 FN	21	15.5	37	14.4	50	22	7.5x4.5x5.3	68	57.5	40.3	18.3	29	60	M5x5	M4	6	M3	M3x3	P3	3.5	3.3	6.1	8.9	6.9	9.9	12.5	17.5	315	105	105	198	3596	WRC 21/15 FN	
WRC 27/20 MN	27	10	42	18.5	60	24	7.5x4.5x5.3	62	70	52	23.5	32	46	M6x6	-	10	M3	M3x4	P4	3.5	4.5	8	13.2	11.5	17.1	21.5	30	634	230	230	320	5259	WRC 27/20 MN	
WRC 27/20 FN	27	19	42	18.5	60	24	7.5x4.5x5.3	80	70	52	23.5	40	70	M6x9	M5	9	M3	M3x4	P4	3.5	4.5	8	9.2	7.5	17.1	21.5	30	634	230	230	553	5259	WRC 27/20 FN	

The above rating load capacities and static moment are calculated according to ISO14728 standard. The rating life for basic dynamic load rating is defined as the total 100km travel distance that 90% of a group of identical linear guides can be operated individually under the same conditions free from any material damage caused by rolling fatigue. When the standard of 50km travel distance is applied, the above basic dynamic load rating C of ISO 14728 should be multiplied by 1.26 for conversion.

WRC...C Series Ball chain type

Model Code	Mounting Dimensions		Rail Dimensions(mm)					Block Dimensions(mm)										Block Dimensions(mm)								Load Capacities (KN)			Static Moment (Nm)			Weight		Model Code
	H	W2	W1	H1	P	P3	Dx dx g1	W	L	L1	h2	P1	P2	Mx g2	M1	T	N1	N2	N3	E	S1	S2	S3	S4	C _{cage}		C ₀	Mr ₀	Mp ₀	My ₀	Block(g)	Rail(g/m)		
																									100km	50km								
WRC 21/15 MN...C	21	8.5	37	14.4	50	22	7.5x4.5x5.3	54	57.5	40.3	18.3	19	31	M5x5	-	6	M3	M3x3	P3	3.5	3.3	6.1	13.9	11.9	11.8	14.9	16.2	295	95	95	159	3596	WRC 21/15 MN...C	
WRC 21/15 FN...C	21	15.5	37	14.4	50	22	7.5x4.5x5.3	68	57.5	40.3	18.3	29	60	M5x5	M4	6	M3	M3x3	P3	3.5	3.3	6.1	8.9	6.9	11.8	14.9	16.2	295	95	95	197.5	3596	WRC 21/15 FN...C	
WRC 27/20 MN...C	27	10	42	18.5	60	24	7.5x4.5x5.3	62	70	52	23.5	32	46	M6x6	-	10	M3	M3x4	P4	3.5	4.5	8	13.2	11.5	22.3	28.1	25.7	535	200	200	318	5259	WRC 27/20 MN...C	
WRC 27/20 FN...C	27	19	42	18.5	60	24	7.5x4.5x5.3	80	70	52	23.5	40	70	M6x9	M5	9	M3	M3x4	P4	3.5	4.5	8	9.2	7.5	22.3	28.1	25.7	535	200	200	550	5259	WRC 27/20 FN...C	

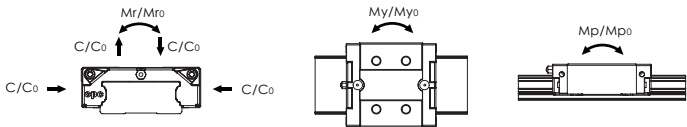

The dynamic load rating value with ball chain Cage is the measured value (please refer to page 11). The above static load rating and the static moment are calculated according to the ISO 14728 standard.




ARR/HRR/LRR series
Roller-type Linear Guide

Product Overview




LRR Extremely Low Profile Type

Compared to the industry's standard, with various combination and low center of gravity provides a more compact space, and is suitable for occasions that need to lower external torque and smaller inertial force. ARR, HRR, LRR's block, all share the same track, and with same load capacity and service life.

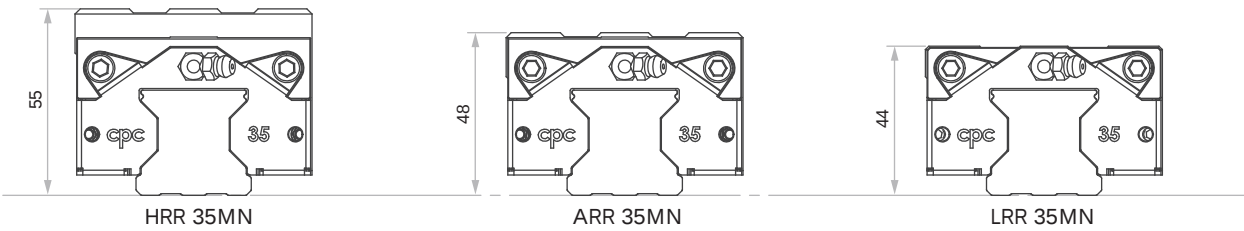

MXL Ultra Long Block Type

Compared to the industry's ML lengthened block, MXL is the model with a much lengthened block and can demonstrate a greater load capability and rigidity, and better shock reduction capability. It's suitable for machine tool that requires super high rigidity and accuracy.

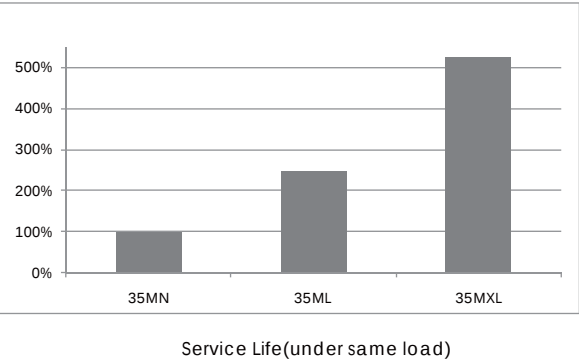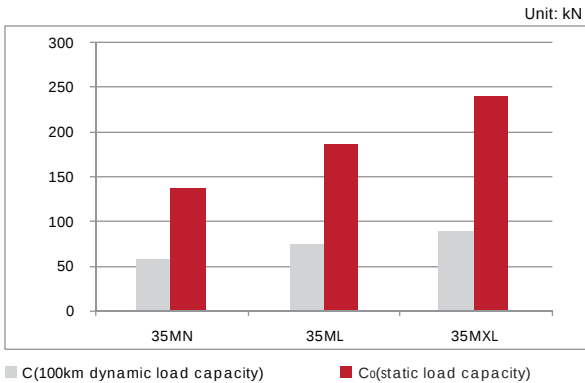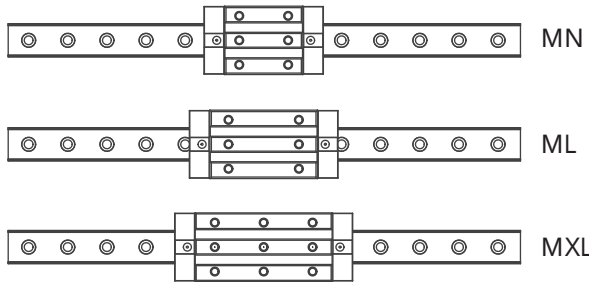

Parts information

Low Noise Roller Chain (Optional)

Ball chain can effectively lower high frequency noise volume while sliding, and enhance smoothness. The ball chain spacer between steel rollers can continuously replenish the oil film cladding to maintain better lubrication effect.
(For more information please refer to page 07)

Full Cover Seal (Standard Feature)

All model type are equipped with "end seal", "bottom seal", "inner seal" and can effectively prevent foreign objects from sliding into the block, and prevent lubrication from leaking out.
(For more information please refer to page 03)

High Rigidity Stainless Steel Reinforcement Plate (Standard Feature)

L-shaped design is locked with end and bottom screw on block body respectively. The bottom of the body is equipped with integrated bolt, and can fix the reinforcement plate tightly to prevent plastic mountings from cracking and result in block damage.
(For more information please refer to page 06)

Metal-Plastic-Cap (Standard Feature)

Stainless steel cover can demonstrate excellent friction resistance ability under harsh environment. Inside the hole plug is equipped with plastic fixed support, having easy installation characteristics, can directly be installed on the standard rail. Contact between support part and stigma screws can prevent over fastening while installation, and can prevent foreign objects from stacking while sliding as well.
(For more information please refer to page 10)

NBR Seal (Optional)


The seal can demonstrate high dustproof ability focusing on the fine dust working condition, such as wood-working machine, glass processing machine, graphite processing machine, and grinder. On the outer side of the seal is equipped with stainless steel scraper, and the clearance between inner contour and rail contour is only 0.2–0.3mm. This can prevent comparatively large foreign objects from damaging rubber seal.
(For more information please refer to page 09)

Ordering Information

Model Code

ARR	U	35	M	N	B	2	C	V1	P	-1480L	-20	-20	II	/J
														Customization code (please refer to page 14)
														Number of rails on the same moving axis
														End hole pitch(mm)
														Starting hole pitch(mm)
														Rail length(mm)
														Accuracy grade: UP, SP, P, H (please refer to page 13)
														Preload class: V0, V1, V2
														C: with ball chain (please refer to page 07)
														Block quantity
														Seal type: S:standard
														Block length: N:standard L:long XL:extra long
														Block width: M:standard F:flanged
														Block type: 35,45
														U: Rail (tapped from the bottom)
														Product type: ARR: Low Profile Type HRR: High Profile Type LRR: Extremely Low Profile Type

Dimensions Table

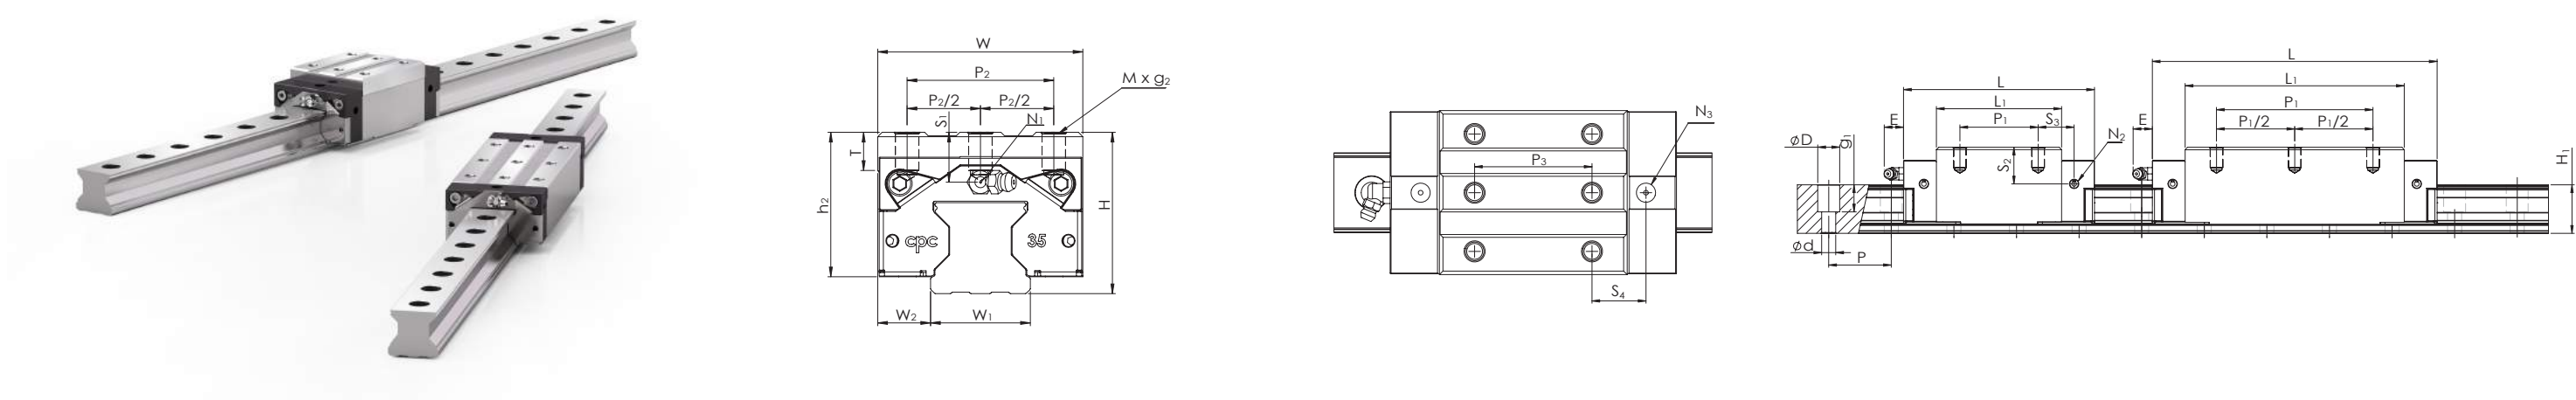

ARR MN/ML/MXL Series

Model Code	Mounting Dimensions		Rail Dimensions(mm)				Block Dimensions(mm)												Block Dimensions(mm)								Load Capacities (KN)		Static Moment (Nm)			Weight		Model Code
	H	W ₂	W ₁	H ₁	P	Dx dxg ₁	W	L	L ₁	h ₂	P ₁	P ₁ /2	P ₂	P ₂ /2	P ₃	M x g ₂	M ₁	T	N ₁	N ₂	N ₃	E	S ₁	S ₂	S ₃	S ₄	C _{iso} 100km	C ₀	Mr ₀	Mp ₀	My ₀	Block(g)	Rail(g/m)	
ARR 35MN	48	18	34	31	40	14x9x17	70	122	84	42	50	-	50	25	50	M8x13	-	13	M6x12	M6x8	P5	12	10	16.4	25	25	57	154	2742	1946	1946	1200	5740	ARR 35MN
ARR 35ML	48	18	34	31	40	14x9x17	70	147.5	109.5	42	72	-	50	25	72	M8x13	-	13	M6x12	M6x8	P5	12	10	16.4	26.7	26.7	68.9	196	3525	3226	3226	1750	5740	ARR 35ML


HRR MN/ML/MXL Series

HRR 35MN	55	18	34	31	40	14x9x17	70	122	84	49	50	-	50	25	50	M8x16	-	13	M6x12	M6x8	P5	12	17	23.4	25	25	57	154	2742	1946	1946	1720	5740	HRR 35MN
HRR 35ML	55	18	34	31	40	14x9x17	70	147.5	109.5	49	72	-	50	25	72	M8x16	-	13	M6x12	M6x8	P5	12	17	23.4	26.7	26.7	68.9	196	3525	3226	3226	2100	5740	HRR 35ML
HRR 35MXL	55	18	34	31	40	14x9x17	70	177.5	139.5	49	100	50	50	25	100	M8x16	-	13	M6x12	M6x8	P5	12	17	23.4	27.7	27.7	82	245	4439	5111	5111	2700	5740	HRR 35MXL

LRR MN/ML/MXL Series




LRR 35MN	44	18	34	31	40	14x9x17	70	122	84	38	50	-	50	25	50	M8x12	-	9	M6x12	M6x8	P5	12	6	12.4	25	25	57	154	2742	1946	1946	1100	5740	LRR 35MN
LRR 35ML	44	18	34	31	40	14x9x17	70	147.5	109.5	38	72	-	50	25	72	M8x12	-	9	M6x12	M6x8	P5	12	6	12.4	26.7	26.7	68.9	196	3525	3226	3226	1500	5740	LRR 35ML
LRR 35MXL	44	18	34	31	40	14x9x17	70	177.5	139.5	38	100	50	50	25	100	M8x12	-	9	M6x12	M6x8	P5	12	6	12.4	27.7	27.7	82	245	4439	5111	5111	1900	5740	LRR 35MXL

1. The load capacities is for full-ball type (without ball chain)
2. N₂ = Injecting holes
3. N₃ = O-ring size for lubrication from above
4. N₂, N₃ will be seal before shipment, open it when using product.

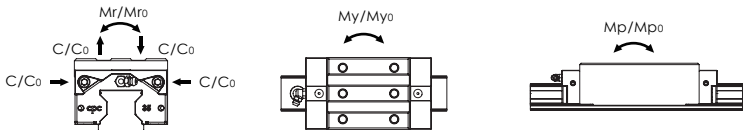

The above rating load capacities and static moment are calculated according to ISO14728 standard. The rating life for basic dynamic load rating is defined as the total 100km travel distance that 90% of a group of identical linear guides can be operated individually under the same conditions free from any material damage caused by rolling fatigue. When the standard of 50km travel distance is applied, the above basic dynamic load rating C of ISO 14728 should be multiplied by 1.26 for conversion.

Dimensions Table

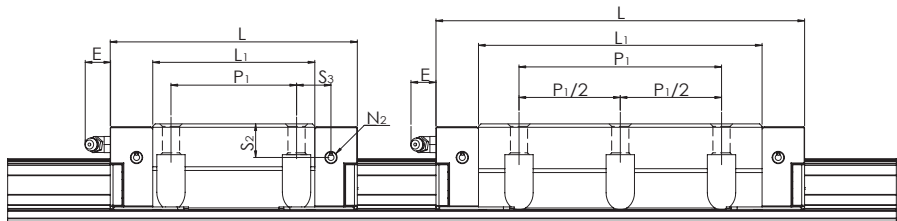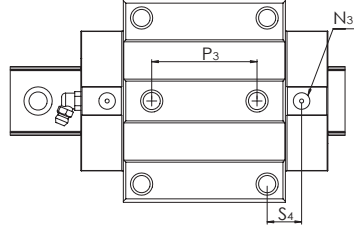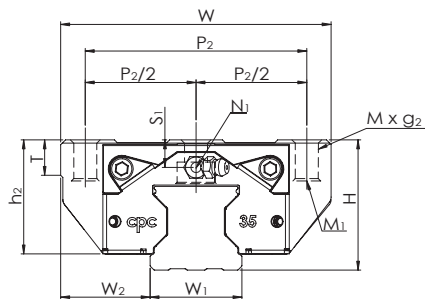


HRR FN/FL/FXL Series

Model Code	Mounting Dimensions		Rail Dimensions(mm)				Block Dimensions(mm)												Block Dimensions(mm)								Load Capacities (KN)		Static Moment (Nm)			Weight		Model Code
	H	W ₂	W ₁	H ₁	P	Dx dxg ₁	W	L	L ₁	h ₂	P ₁	P ₁ /2	P ₂	P ₂ /2	P ₃	M x G ₂	M ₁	T	N ₁	N ₂	N ₃	E	S ₁	S ₂	S ₃	S ₄	C _{iso} 100km	C ₀	Mr ₀	Mp ₀	My ₀	Block(g)	Rail(g/m)	
HRR 35FN	48	33	34	31	40	14x9x17	100	122	84	42	62	-	82	41	52	M10x15	M8	13	M6x12	M6x8	P5	12	10	16.4	19	19	57	154	2742	1946	1946	1700	5740	HRR 35FN
HRR 35FL	48	33	34	31	40	14x9x17	100	147.5	109.5	42	62	-	82	41	52	M10x15	M8	13	M6x12	M6x8	P5	12	10	16.4	31.7	31.7	68.9	196	3525	3226	3226	2400	5740	HRR 35FL
HRR 35FXL	48	33	34	31	40	14x9x17	100	177.5	139.5	42	100	50	82	41	100	M10x15	M8	13	M6x12	M6x8	P5	12	10	16.4	27.7	27.7	82	245	4439	5111	5111	3100	5740	HRR 35FXL

LRR FN/FL/FXL Series




LRR 35FN	44	33	34	31	40	14x9x17	100	122	84	38	62	-	82	41	52	M10x11	M8	9	M6x12	M6x8	P5	12	6	12.4	19	19	57	154	2742	1946	1946	1550	5740	LRR 35FN
LRR 35FL	44	33	34	31	40	14x9x17	100	147.5	109.5	38	62	-	82	41	52	M10x11	M8	9	M6x12	M6x8	P5	12	6	12.4	31.7	31.7	68.9	196	3525	3226	3226	2200	5740	LRR 35FL
LRR 35FXL	44	33	34	31	40	14x9x17	100	177.5	139.5	38	100	50	82	41	100	M10x11	M8	9	M6x12	M6x8	P5	12	6	12.4	27.7	27.7	82	245	4439	5111	5111	2800	5740	LRR 35FXL

1. The load capacities is for full-ball type (without ball chain)
2. N₂ = Injecting holes
3. N₃ = O-ring size for lubrication from above
4. N₂, N₃ will be seal before shipment, open it when using product.

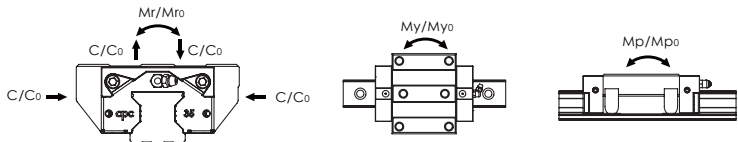

The above rating load capacities and static moment are calculated according to ISO14728 standard. The rating life for basic dynamic load rating is defined as the total 100km travel distance that 90% of a group of identical linear guides can be operated individually under the same conditions free from any material damage caused by rolling fatigue. When the standard of 50km travel distance is applied, the above basic dynamic load rating C of ISO 14728 should be multiplied by 1.26 for conversion.

Dimensions Table

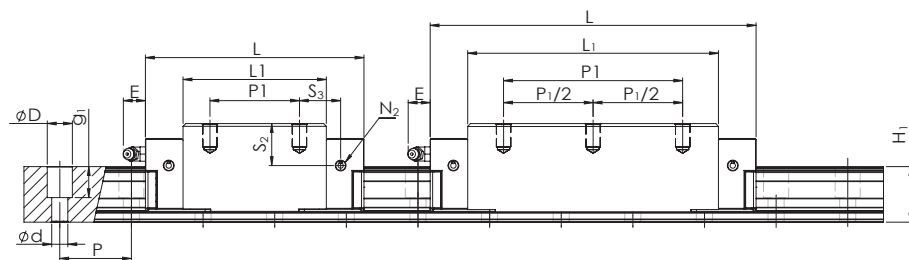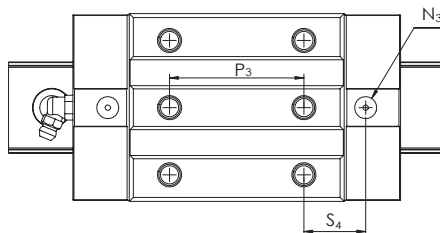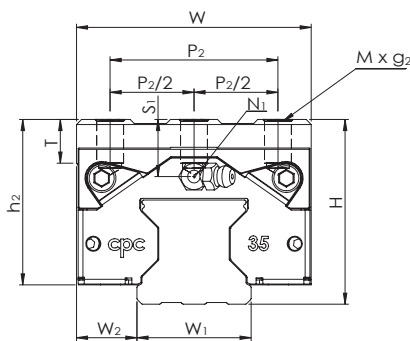

ARR MN/ML/MXL...C Series (Ball chain type)

Model Code	Mounting Dimensions		Rail Dimensions(mm)				Block Dimensions(mm)												Block Dimensions(mm)								Load Capacities (KN)		Static Moment (Nm)			Weight		Model Code
	H	W ₂	W ₁	H ₁	P	Dx dxg ₁	W	L	L ₁	h ₂	P ₁	P ₁ /2	P ₂	P ₂ /2	P ₃	M x g ₂	M ₁	T	N ₁	N ₂	N ₃	E	S ₁	S ₂	S ₃	S ₄	C _{cage} 100km	C ₀	M _{r0}	M _{p0}	M _{y0}	Block(g)	Rail(g/m)	
ARR 35MN	48	18	34	31	40	14x9x17	70	122	84	42	50	-	50	25	50	M8x13	-	13	M6x12	M6x8	P5	12	10	16.4	25	25	71.3	133	2350	1710	1710	1200	5800	ARR 35MN
ARR 35ML	48	18	34	31	40	14x9x17	70	147.5	109.5	42	72	-	50	25	72	M8x13	-	13	M6x12	M6x8	P5	12	10	16.4	26.7	26.7	86.1	175	3133	2881	2881	1750	5850	ARR 35ML




HRR MN/ML/MXL...C Series (Ball chain type)

HRR 35MN	55	18	34	31	40	14x9x17	70	122	84	49	50	-	50	25	50	M8x16	-	13	M6x12	M6x8	P5	12	17	23.4	25	25	71.3	133	2350	1710	1710	1720	5721	HRR 35MN
HRR 35ML	55	18	34	31	40	14x9x17	70	147.5	109.5	49	72	-	50	25	72	M8x16	-	13	M6x12	M6x8	P5	12	17	23.4	26.7	26.7	86.1	175	3133	2881	2881	2100	5850	HRR 35ML
HRR 35MXL	55	18	34	31	40	14x9x17	70	177.5	139.5	49	100	50	50	25	100	M8x16	-	13	M6x12	M6x8	P5	12	17	23.4	27.7	27.7	102.5	224	4047	4695	4695	2700	5850	HRR 35MXL

LRR MN/ML/MXL...C Series (Ball chain type)




LRR 35MN	44	18	34	31	40	14x9x17	70	122	84	38	50	-	50	25	50	M8x12	-	9	M6x12	M6x8	P5	12	6	12.4	25	25	71.3	133	2350	1710	1710	1100	5850	LRR 35MN
LRR 35ML	44	18	34	31	40	14x9x17	70	147.5	109.5	38	72	-	50	25	72	M8x12	-	9	M6x12	M6x8	P5	12	6	12.4	26.7	26.7	86.1	175	3133	2881	2881	1500	5850	LRR 35ML
LRR 35MXL	44	18	34	31	40	14x9x17	70	177.5	139.5	38	100	50	50	25	100	M8x12	-	9	M6x12	M6x8	P5	12	6	12.4	27.7	27.7	102.5	224	4047	4695	4695	1900	5850	LRR 35MXL

1. N₂ = Injecting holes
2. N₃ = O-ring size for lubrication from above
3. N₂, N₃ will be seal before shipment, open it when using product.



The dynamic load rating value with ball chain C_{cage} is the measured value. The above static load rating and the static moment are calculated according to the ISO 14728 standard.

Dimensions Table

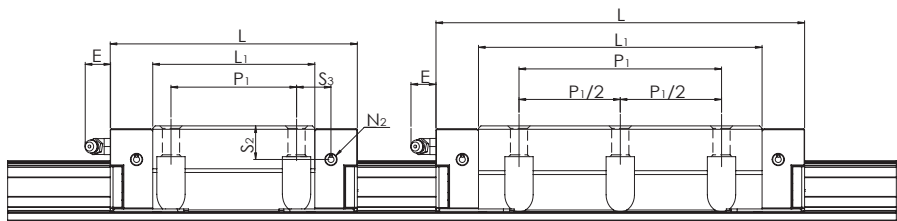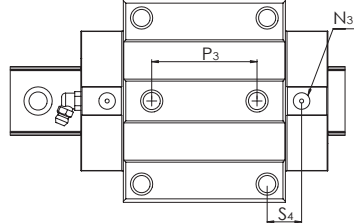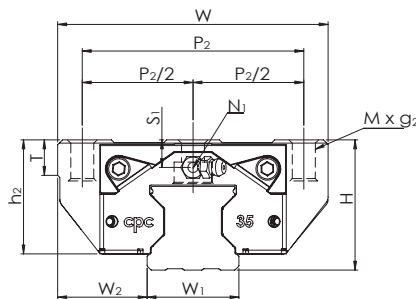


HRR FN/FL/FXL...C Series (Ball chain type)

Model Code	Mounting Dimensions		Rail Dimensions(mm)				Block Dimensions(mm)												Block Dimensions(mm)								Load Capacities (KN)		Static Moment (Nm)			Weight		Model Code
	H	W ₂	W ₁	H ₁	P	Dx dx _{g1}	W	L	L ₁	h ₂	P ₁	P ₁ /2	P ₂	P ₂ /2	P ₃	M x G ₂	M ₁	T	N ₁	N ₂	N ₃	E	S ₁	S ₂	S ₃	S ₄	C _{cage} 100km	C ₀	M _{r0}	M _{p0}	M _{y0}	Block(g)	Rail(g/m)	
HRR 35FN	48	33	34	31	40	14x9x17	100	122	84	42	62	-	82	41	52	M10x15	M8	13	M6x12	M6x8	P5	12	10	16.4	19	19	71.3	133	2350	1710	1710	1700	5800	HRR 35FN
HRR 35FL	48	33	34	31	40	14x9x17	100	147.5	109.5	42	62	-	82	41	52	M10x15	M8	13	M6x12	M6x8	P5	12	10	16.4	31.7	31.7	86.1	175	3133	2881	2881	2400	5800	HRR 35FL
HRR 35FXL	48	33	34	31	40	14x9x17	100	177.5	139.5	42	100	50	82	41	100	M10x15	M8	13	M6x12	M6x8	P5	12	10	16.4	27.7	27.7	102.5	224	4047	4695	4695	3100	5800	HRR 35FXL

LRR FN/FL/FXL...C Series (Ball chain type)

LRR 35FN	44	33	34	31	40	14x9x17	100	122	84	38	62	-	82	41	52	M10x11	M8	9	M6x12	M6x8	P5	12	6	12.4	19	19	71.3	133	2350	1710	1710	1550	5800	LRR 35FN
LRR 35FL	44	33	34	31	40	14x9x17	100	147.5	109.5	38	62	-	82	41	52	M10x11	M8	9	M6x12	M6x8	P5	12	6	12.4	31.7	31.7	86.1	175	3133	2881	2881	2200	5800	LRR 35FL
LRR 35FXL	44	33	34	31	40	14x9x17	100	177.5	139.5	38	100	50	82	41	100	M10x11	M8	9	M6x12	M6x8	P5	12	6	12.4	27.7	27.7	102.5	224	4047	4695	4695	2800	5800	LRR 35FXL

1. N₂ = Injecting holes
2. N₃ = O-ring size for lubrication from above
3. N₂, N₃ will be seal before shipment, open it when using product.

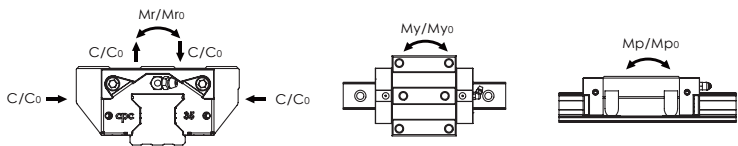

The dynamic load rating value with ball chain C_{cage} is the measured value. The above static load rating and the static moment are calculated according to the ISO 14728 standard.

Nipple Option

Grease nipple/ Oil piping joint

A - M3	B - M3	B - M6	B - PT1/8
OB - M3 - M6	OA-M3-D4	OA-M6-M8	OA-M6-PT1/8
OA-M6-G1/8	OB-M6-M8	OB-M6-PT1/8	OA-PT1/8-M8
OA-M6-G1/8	OB-M6-M8	OB-M6-PT1/8	OA-PT1/8-M8
OA-PT1/8-PT1/8	OA-PT1/8-G1/8	OB-PT1/8-M8	OB-PT1/8-PT1/8

- L type nipple is for ball bearing external seal (SN) and roller type
- XL type nipple is for roller type external seal (SN)
Note: if there is any customization need, please contact **cpc** for more information

B - M6 - L	OA-M6-M8-L	OA-M6-PT1/8-L	OA-M6-G1/8-L
OB-M6-M8-L	OB-M6-PT1/8-L	A - M3 - L	B - M3 - L
B - PT1/8-L	B - M6 - XL	OA-M6-M8-XL	OA-M6-PT1/8-XL
OA-M6-G1/8-XL	OB-M6-M8-XL	OB-M6-PT1/8-XL	

Lubrication Kit and Grease Gun

cpc Lubrication Unit is a supply nozzle with 3 different sizes of nozzle adaptors. These nozzle adaptors are suitable for different size of grease nipple on different size of linear blocks.




Nipple Option

Type			Nipple Size		Nipple Type
			Section	Side	Standard
ARC15	HRC15	-	M3	M3	A-M3
ARC20	HRC20	-	M3	M3	B-M3
ARC25	HRC25	ERC25	M6	M3	B-M6
ARC30	HRC30	-	M6	M6	B-M6
ARC35	HRC35	-	M6	M6	B-M6
ARC45	HRC45	-	PT1/8	M6	B-PT1/8
ARC55	HRC55	-	M6	M6	B-M6


GP-PT1/8-01 Lubrication Kit

The Lubrication Kit is with a supply nozzle (GT-1/8-M5) and three kinds of different nozzle adaptors (GH-M5-MR, GH-M5-06, GH-M5-08).

The supply nozzle can be mount on the main body of common manual or pneumatic grease gun with PT1/8 tapped connector available on the market.

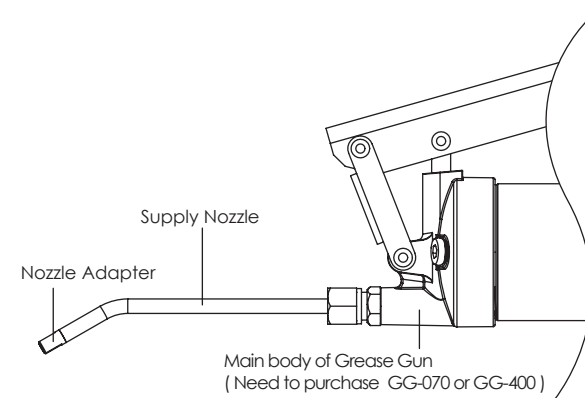

Greasing Diagram

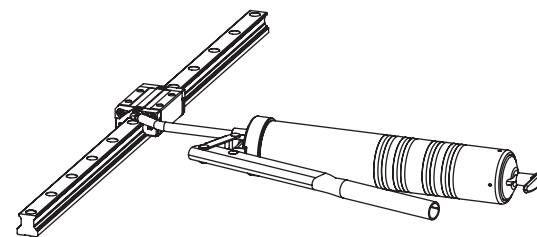

Supply Nozzle

Type	Dimension
GT-PT1/8-M5	

Nozzle Adapter

Unit: mm

Type	Dimension	Grease Nipple
GH-M5-MR		MR series Minature linear guide size MR-15M 、MR-15W MR-12M 、MR-12W
GH-M5-06		A-M3 A-M3X
GH-M5-08		B-M3 B-M3X
GH-M5-08		B-M6 B-M6X
GH-M5-08		B-PT1/8 B-PT1/8X

Main body of Grease Gun

Option for Main body of Grease Gun: GG-070 for 70g volume grease pack and GG-400 for 400g volume grease pack.

Unit: mm

Type	Dimension	Feature
GG-070		1. Pressure: 27Mpa 2. Output Volume: 0.5~0.7 c.c/stroke 3. Grease: Suitable for 70g volume grease pack or bulk loading
GG-400		1. Pressure: 62Mpa 2. Output Volume: 1.0~1.2 c.c/stroke 3. Grease: Suitable for 400g volume grease pack or bulk loading

cpc AR/HR Z Series Lubrication Storages Pad Testing Report

A linear guide is a category of rolling guidance, by using unlimited re-circulating stainless steel balls operate between the raceways of the rail and the block, result in the moving table achieving high precision and low friction linear movement. If the linear guide do not have sufficient lubrication, rolling friction will increase, cause wear and shortened linear guide life span in long term operation.

cpc has added and embedded PU lubricant storage pads to lengthen linear guide operational life; the pads directly contact and lubricate the rolling balls. This design supplies sufficient lubrication even during short-stroke operations.

cpc's design, due to the embedded pad's absorption and retention capabilities, results in a product that features a long operational life and long-term lubrication.


The following is the cpc in-house life test results:

AR15 Lubrication Storage Pad Testing Data


Testing products : AR15-Blocks with Lubrication Storages Pad 8pcs,
AR15-Rail-N-class-L1500mm 4pcs

Testing condition	
Rating load capacities(each Block)	1.8KN(C=9KN・C0=17.5KN)
Stroke	0.96m
Max running speed	1m/s
Lubricant	DAPHNE SUPER MULTI 68 (Viscosity64.32 CST 40OC)
Lubrication period	No lubrication added during testing period


■ Testing equipment

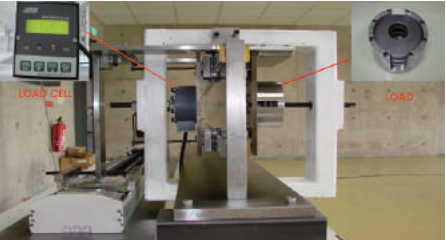


■ Testing result

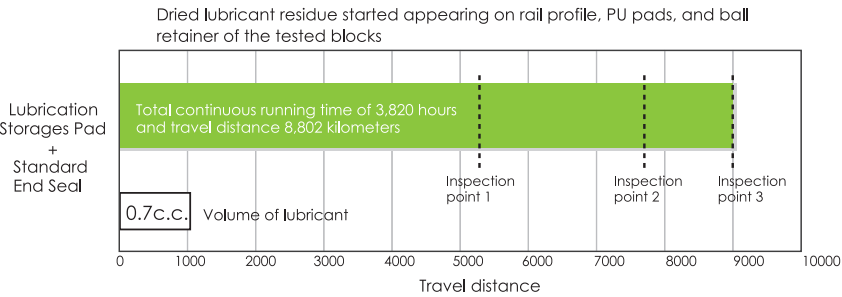

■ Testing result of inspection point

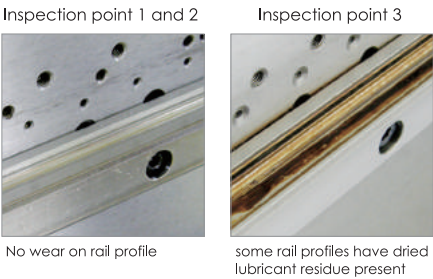

Inspection point 1 and 2 : Lubrication result



- Upward Lubrication Storages Pad in good condition
- lubricant supply in good condition
- Running profile of rail no wear out



- Downward Lubrication Storages Pad in good condition
- lubricant supply in good condition

Inspection point 3 : Lubrication result



- Dried lubricant residue started appearing broken on upward Lubrication Storages pad of the tested blocks



- Dried lubricant residue started appearing broken on downward Lubrication Storages pad of the tested blocks

Plastic parts and end seal in good condition



Plastic parts in good condition



End seal in good condition

■ Test Summary

Total continuous running time of 3820 hours and travel distance 8802 kilometers.
Out of eight test blocks, dried lubricant residue appeared on 2 blocks and 1 rail. Dried lubricant residue is indicative of a need for re-lubrication.
The test results indicated that the lubrication pad design effectively extends re-lubrication requirement and thus lengthens linear operational life.