



Double row track rollers - cylindrical and spherical (Continued)

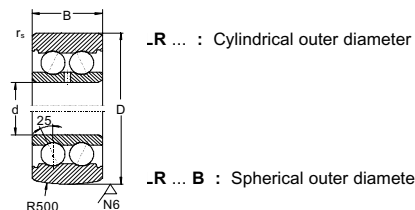

Cages and shields

■	Available
■	Feasible (minimum quantity)
■	Out of program

d	Dimensions		r _s min	Designation	Limiting speeds			Basic load ratings		Balls	Abutment dimensions da min mm inch	Mass ~ gr	Designation	Cage T9H Shields													
	D	B			Oil	Grease	Contact seals	Dyn. Cr kN	Stat. Cor kN					Open	Z	ZZ	RSR	2RSR	RSF	2RSF	RSV	2RSV					
	mm inch	mm inch																									
15	35 .591	13 .512	0.3 .012	LR5002	30	24	14	6.92	4.75	22x5/32"	17.0 .669	50	LR5002	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	35 1.378	13 .512	0.3 .012	LR5002B	30	24	14	6.92	4.75	22x5/32"	17.0 .669	50	LR5002B	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	40 1.575	15.9 .626	0.6 .024	LR5202	26	20	13	11.8	7.1	16x6mm	19.0 .748	110	LR5202	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	40 1.575	15.9 .626	0.6 .024	LR5202B	26	20	13	11.8	7.1	16x6mm	19.0 .748	110	LR5202B	■	■	■	■	■	■	■	■	■	■	■	■	■	■
17	40 .6693	14 .551	0.3 .012	LR5003	28	22	13	9.07	6.08	20x3/16"	19.0 .748	70	LR5003	■	■	■	■	■	■	■	■	■	■	■	■	■	■
	40 1.575	14 .551	0.3 .012	LR5003B	28	22	13	9.07	6.08	20x3/16"	19.0 .748	70	LR5003B	■	■	■	■	■	■	■	■	■	■	■	■	■	■

PRECISION BALL BEARINGS STANDARD AND SPECIAL

WIB SA, Champ-Barby 61, 1630 BULLE, Switzerland

Tel: (+41) 26 919 11 22, Fax: (+41) 26 919 11 20

http://www.wib-bearings.com info@wib-bearings.com